



ALPHA & OMEGA
SEMICONDUCTOR

AOT288L/AOB288L/AOTF288L 80V N-Channel MOSFET

General Description

The AOT288L & AOB288L & AOTF288L uses trench MOSFET technology that is uniquely optimized to provide the most efficient high frequency switching performance. Both conduction and switching power losses are minimized due to an extremely low combination of $R_{DS(ON)}$, Ciss and Coss. This device is ideal for boost converters and synchronous rectifiers for consumer, telecom, industrial power supplies and LED backlighting.

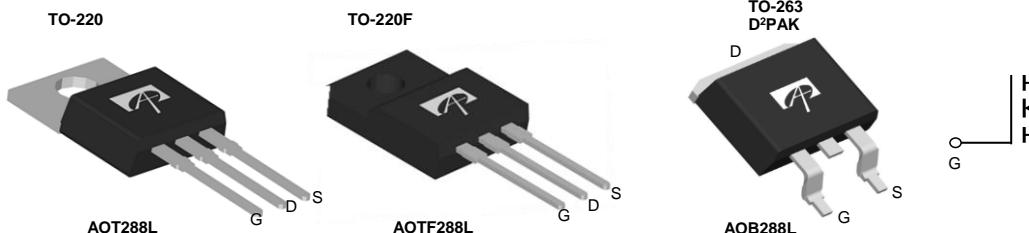
Product Summary

V_{DS}	80V
I_D (at $V_{GS}=10V$)	46A / 43A
$R_{DS(ON)}$ (at $V_{GS}=10V$)	< 9.2mΩ(< 8.9mΩ*)
$R_{DS(ON)}$ (at $V_{GS}=6V$)	<12.5mΩ(< 12.2mΩ*)

100% UIS Tested
100% R_g Tested



Top View



Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	AOT288L/AOB288L	AOTF288L	Units
Drain-Source Voltage	V_{DS}	80		V
Gate-Source Voltage	V_{GS}	± 20		V
Continuous Drain Current ^G	I_D	46	43	A
$T_C=100^\circ\text{C}$		36	30	
Pulsed Drain Current ^C	I_{DM}	160		
Continuous Drain Current	I_{DSM}	10.5		A
$T_A=70^\circ\text{C}$		8		
Avalanche Current ^C	I_{AS}	35		A
Avalanche energy L=0.1mH ^C	E_{AS}	61		mJ
Power Dissipation ^B	P_D	93.5	35.5	W
$T_C=100^\circ\text{C}$		46.5	17.5	
Power Dissipation ^A	P_{DSM}	2.1		W
$T_A=70^\circ\text{C}$		1.3		
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 175		°C

Thermal Characteristics

Parameter	Symbol	AOT288L/AOB288L	AOTF288L	Units
Maximum Junction-to-Ambient ^A	$t \leq 10\text{s}$	15	15	°C/W
Maximum Junction-to-Ambient ^{A,D}	Steady-State	60	60	°C/W
Maximum Junction-to-Case	Steady-State	1.6	4.2	°C/W

* Surface mount package TO263

Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	$I_D=250\mu\text{A}, V_{GS}=0\text{V}$	80			V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=80\text{V}, V_{GS}=0\text{V}$ $T_J=55^\circ\text{C}$		1	5	μA
I_{GSS}	Gate-Body leakage current	$V_{DS}=0\text{V}, V_{GS}=\pm 20\text{V}$			± 100	nA
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu\text{A}$	2.3	2.8	3.4	V
$I_{\text{D}(\text{ON})}$	On state drain current	$V_{GS}=10\text{V}, V_{DS}=5\text{V}$	160			A
$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance	$V_{GS}=10\text{V}, I_D=20\text{A}$		7.6	9.2	$\text{m}\Omega$
		TO220/TO220F $T_J=125^\circ\text{C}$		12.6	15.2	
		$V_{GS}=6\text{V}, I_D=20\text{A}$ TO220/TO220F		9.5	12.5	$\text{m}\Omega$
		$V_{GS}=10\text{V}, I_D=20\text{A}$ TO263		7.3	8.9	$\text{m}\Omega$
		$V_{GS}=6\text{V}, I_D=20\text{A}$ TO263		9.2	12.2	$\text{m}\Omega$
g_{FS}	Forward Transconductance	$V_{DS}=5\text{V}, I_D=20\text{A}$		50		S
V_{SD}	Diode Forward Voltage	$I_S=1\text{A}, V_{GS}=0\text{V}$		0.71	1	V
I_S	Maximum Body-Diode Continuous Current ^G				46	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	$V_{GS}=0\text{V}, V_{DS}=40\text{V}, f=1\text{MHz}$		1871		pF
C_{oss}	Output Capacitance			265		pF
C_{rss}	Reverse Transfer Capacitance			14		pF
R_g	Gate resistance	$V_{GS}=0\text{V}, V_{DS}=0\text{V}, f=1\text{MHz}$	0.6	1.3	2	Ω
SWITCHING PARAMETERS						
$Q_{\text{g}(10\text{V})}$	Total Gate Charge	$V_{GS}=10\text{V}, V_{DS}=40\text{V}, I_D=20\text{A}$		26.5	38	nC
Q_{gs}	Gate Source Charge			8.5		nC
Q_{gd}	Gate Drain Charge			4		nC
$t_{\text{D}(\text{on})}$	Turn-On DelayTime	$V_{GS}=10\text{V}, V_{DS}=40\text{V}, R_L=2\Omega,$ $R_{\text{GEN}}=3\Omega$		11.5		ns
t_r	Turn-On Rise Time			8.5		ns
$t_{\text{D}(\text{off})}$	Turn-Off DelayTime			21.5		ns
t_f	Turn-Off Fall Time			5.5		ns
t_{rr}	Body Diode Reverse Recovery Time	$I_F=20\text{A}, dI/dt=500\text{A}/\mu\text{s}$		32		ns
Q_{rr}	Body Diode Reverse Recovery Charge	$I_F=20\text{A}, dI/dt=500\text{A}/\mu\text{s}$		162		nC

A. The value of R_{JJA} is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{C}$. The Power dissipation P_{DSM} is based on R_{JJA} and the maximum allowed junction temperature of 150°C . The value in any given application depends on the user's specific board design, and the maximum temperature of 175°C may be used if the PCB allows it.

B. The power dissipation P_D is based on $T_{\text{J}(\text{MAX})}=175^\circ\text{C}$, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.

C. Repetitive rating, pulse width limited by junction temperature $T_{\text{J}(\text{MAX})}=175^\circ\text{C}$. Ratings are based on low frequency and duty cycles to keep initial $T_J=25^\circ\text{C}$.

D. The R_{JJA} is the sum of the thermal impedance from junction to case R_{JC} and case to ambient.

E. The static characteristics in Figures 1 to 6 are obtained using <300 μs pulses, duty cycle 0.5% max.

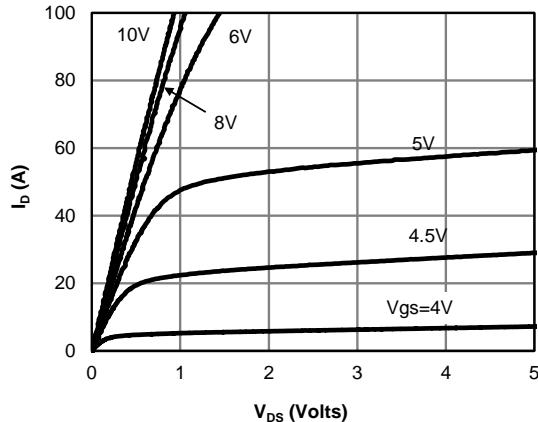
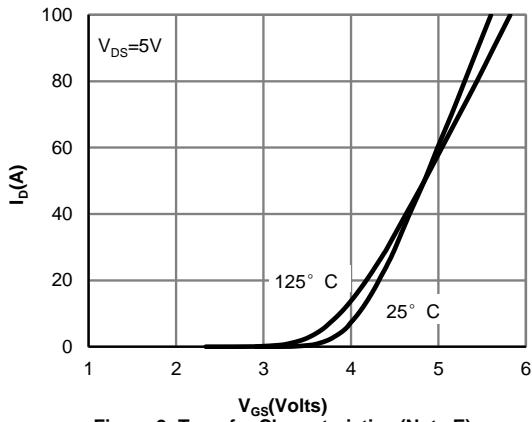
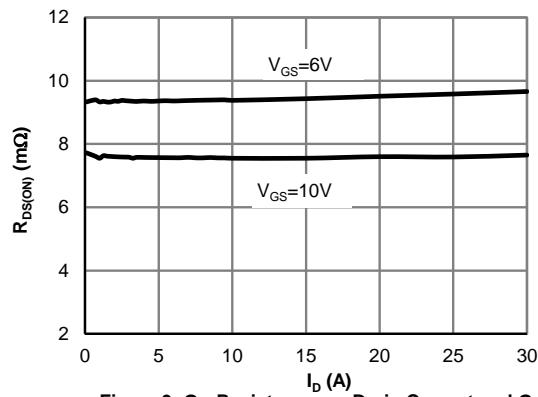
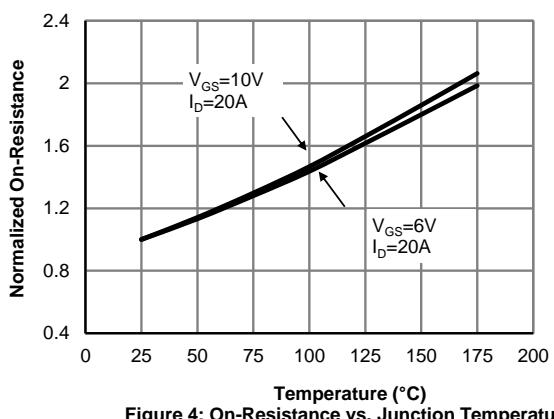
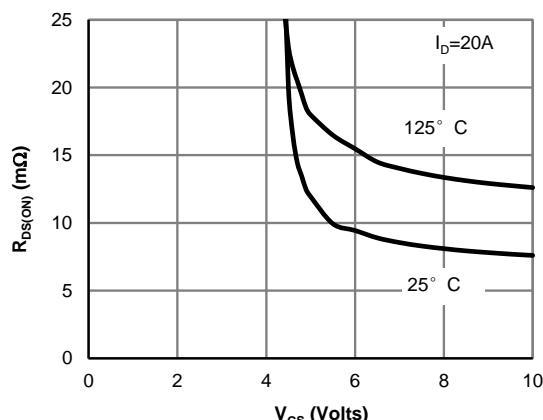
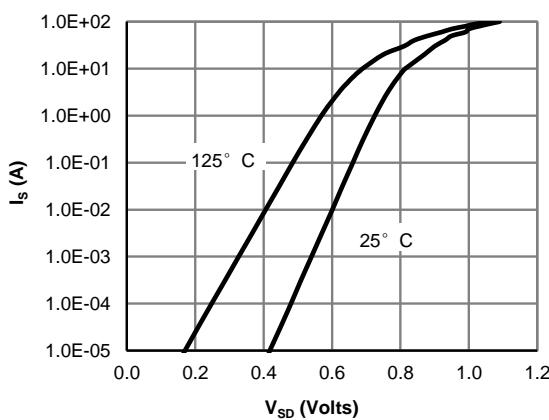
F. These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of $T_{\text{J}(\text{MAX})}=175^\circ\text{C}$. The SOA curve provides a single pulse rating.

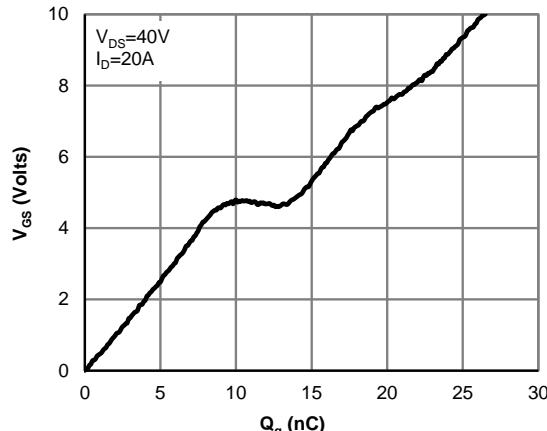
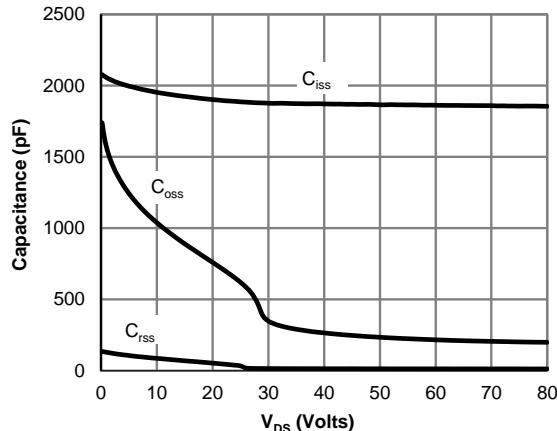
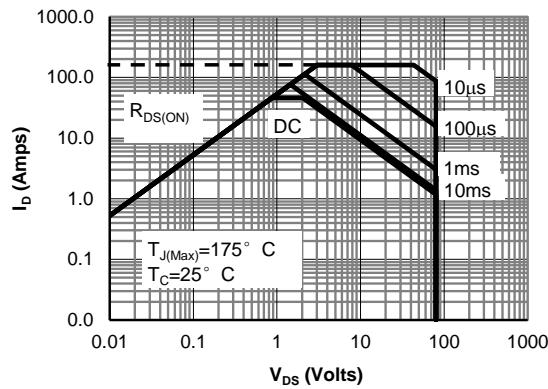
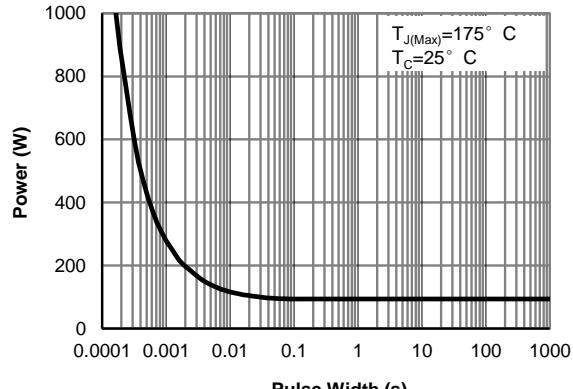
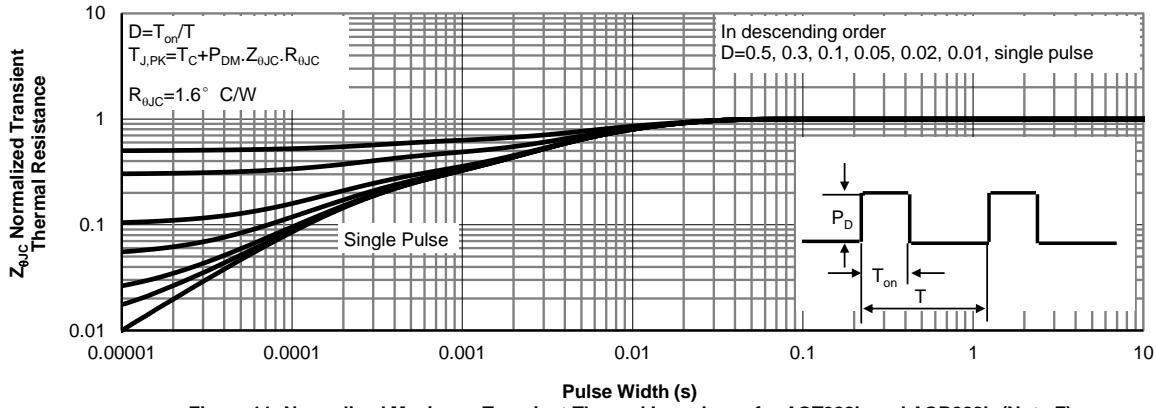
G. The maximum current limited by package.

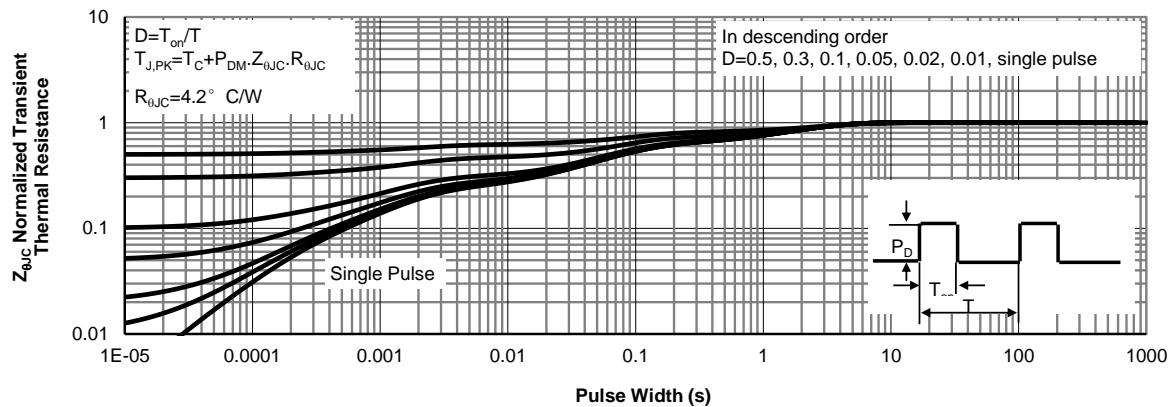
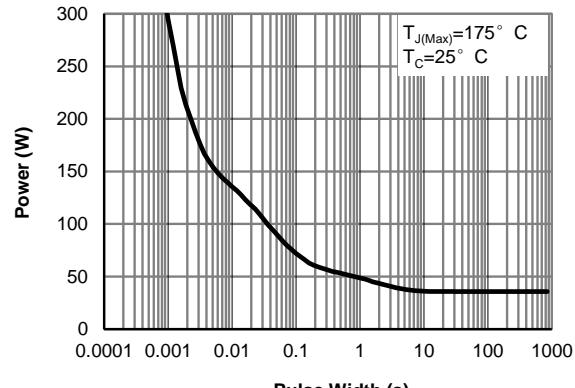
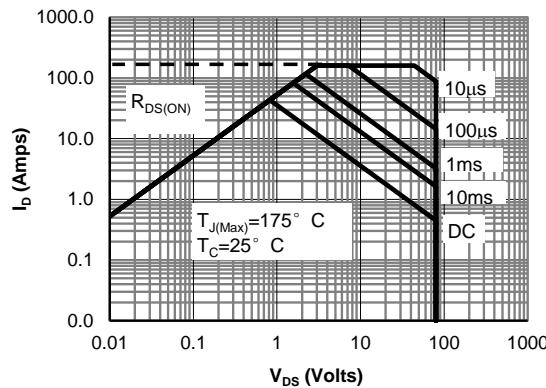
H. These tests are performed with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{C}$.

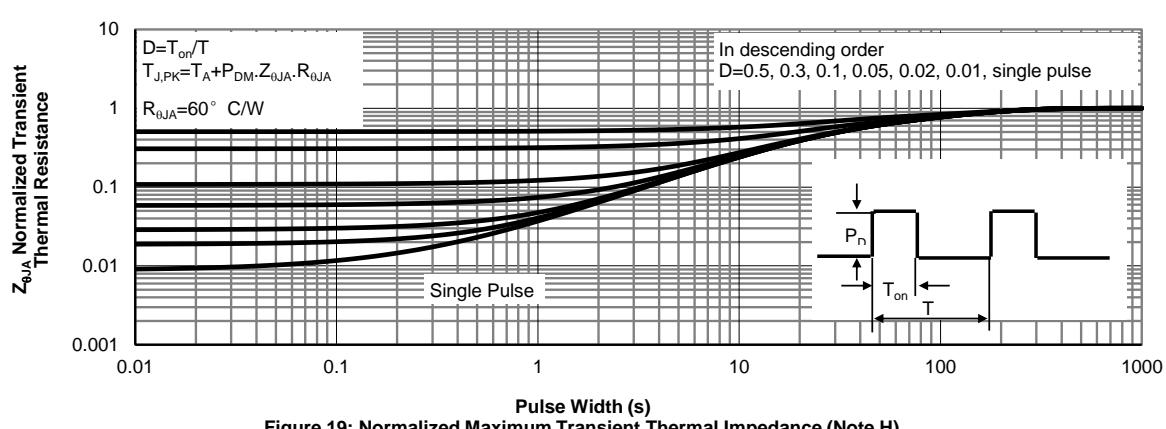
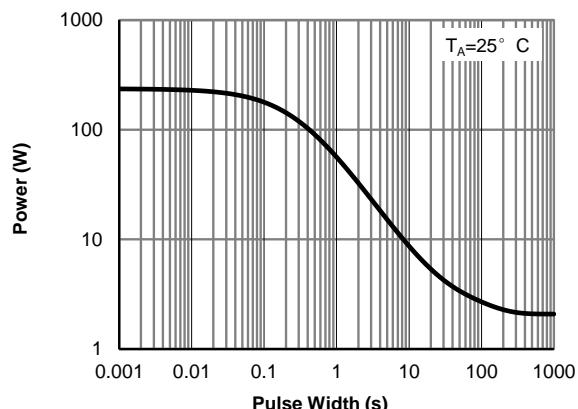
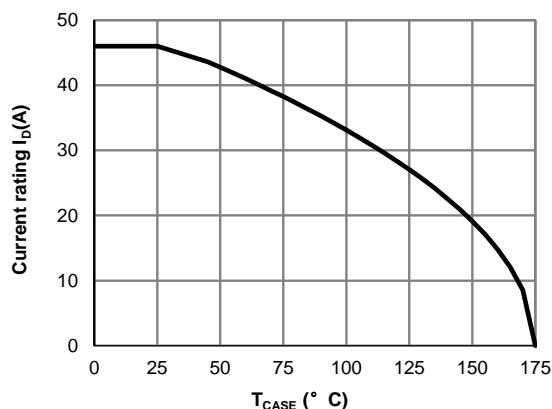
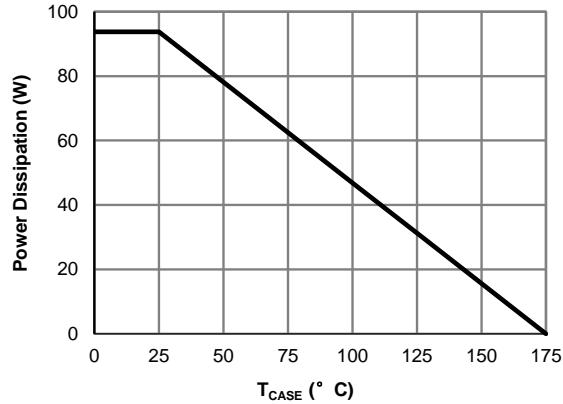
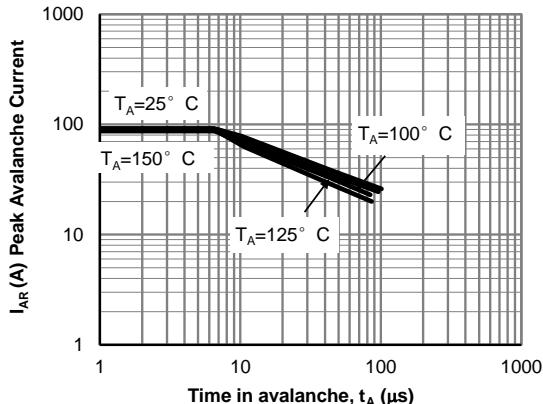
APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO MAKE CHANGES TO PRODUCT SPECIFICATIONS WITHOUT NOTICE. IT IS THE RESPONSIBILITY OF THE CUSTOMER TO EVALUATE SUITABILITY OF THE PRODUCT FOR THEIR INTENDED APPLICATION. CUSTOMER SHALL COMPLY WITH APPLICABLE LEGAL REQUIREMENTS, INCLUDING ALL APPLICABLE EXPORT CONTROL RULES, REGULATIONS AND LIMITATIONS.

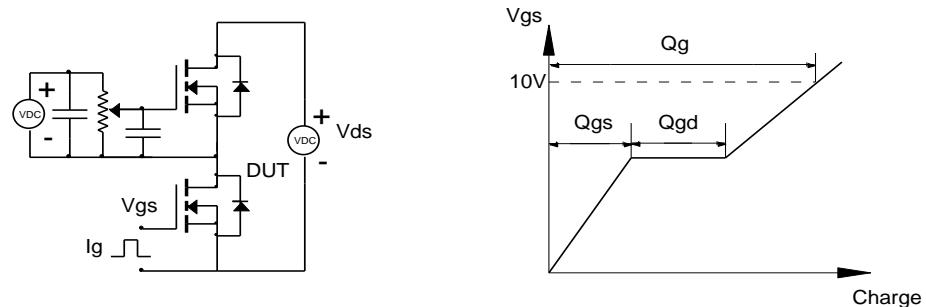
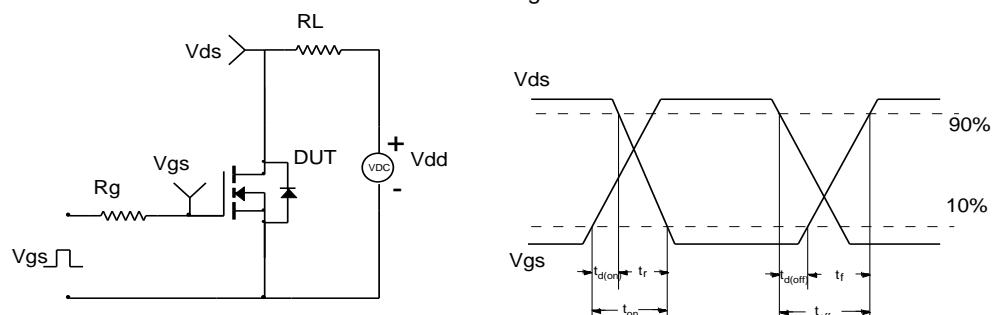
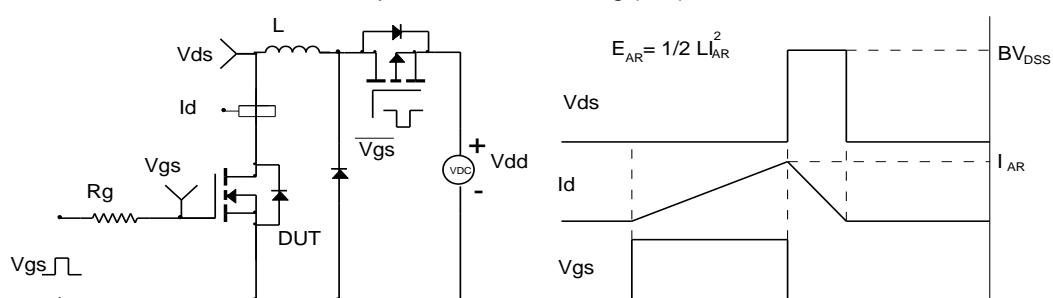
AOS' products are provided subject to AOS' terms and conditions of sale which are set forth at:
http://www.aosmd.com/terms_and_conditions_of_sale

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

Fig 1: On-Region Characteristics (Note E)

Figure 2: Transfer Characteristics (Note E)

Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)

Figure 4: On-Resistance vs. Junction Temperature (Note E)

Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)

Figure 6: Body-Diode Characteristics (Note E)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

Figure 7: Gate-Charge Characteristics

Figure 8: Capacitance Characteristics

Figure 9: Maximum Forward Biased Safe Operating Area for AOT288L and AOB288L (Note F)

Figure 10: Single Pulse Power Rating Junction-to-Case for AOT288L and AOB288L (Note F)

Figure 11: Normalized Maximum Transient Thermal Impedance for AOT288L and AOB288L (Note F)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS


TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS



Gate Charge Test Circuit & Waveform

Resistive Switching Test Circuit & Waveforms

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

Diode Recovery Test Circuit & Waveforms
