



**ALPHA & OMEGA**  
SEMICONDUCTOR

# AOT8N50/AOTF8N50

## 500V, 9A N-Channel MOSFET


### General Description

The AOT8N50 & AOTF8N50 have been fabricated using an advanced high voltage MOSFET process that is designed to deliver high levels of performance and robustness in popular AC-DC applications. By providing low  $R_{DS(on)}$ ,  $C_{iss}$  and  $C_{rss}$  along with guaranteed avalanche capability these parts can be adopted quickly into new and existing offline power supply designs.


### Product Summary

$V_{DS}$	600V@150°C
$I_D$ (at $V_{GS}=10V$ )	9A
$R_{DS(ON)}$ (at $V_{GS}=10V$ )	< 0.85Ω


100% UIS Tested  
100%  $R_g$  Tested



TO-220 Top View



TO-220F



### Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	AOT8N50	AOTF8N50	Units
Drain-Source Voltage	$V_{DS}$	500		V
Gate-Source Voltage	$V_{GS}$	$\pm 30$		V
Continuous Drain Current	$I_D$	9	9*	A
$T_C=100^\circ\text{C}$		6	6*	
Pulsed Drain Current <sup>C</sup>	$I_{DM}$	30		
Avalanche Current <sup>C</sup>	$I_{AR}$	3.2		A
Repetitive avalanche energy <sup>C</sup>	$E_{AR}$	154		mJ
Single pulsed avalanche energy <sup>G</sup>	$E_{AS}$	307		mJ
Peak diode recovery dv/dt	dv/dt	5		V/ns
$T_C=25^\circ\text{C}$	$P_D$	192	38.5	W
Power Dissipation <sup>B</sup> Derate above $25^\circ\text{C}$		1.5	0.3	W/°C
Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to 150		°C
Maximum lead temperature for soldering purpose, 1/8" from case for 5 seconds	$T_L$	300		°C

### Thermal Characteristics

Parameter	Symbol	AOT8N50	AOTF8N50	Units
Maximum Junction-to-Ambient <sup>A,D</sup>	$R_{θJA}$	65	65	°C/W
Maximum Case-to-sink <sup>A</sup>	$R_{θCS}$	0.5	--	°C/W
Maximum Junction-to-Case	$R_{θJC}$	0.65	3.25	°C/W

\* Drain current limited by maximum junction temperature.

**Electrical Characteristics ( $T_J=25^\circ\text{C}$  unless otherwise noted)**

Symbol	Parameter	Conditions	Min	Typ	Max	Units
<b>STATIC PARAMETERS</b>						
$BV_{DSS}$	Drain-Source Breakdown Voltage	$I_D=250\mu\text{A}, V_{GS}=0\text{V}, T_J=25^\circ\text{C}$	500			V
		$I_D=250\mu\text{A}, V_{GS}=0\text{V}, T_J=150^\circ\text{C}$		600		
$BV_{DSS}/\Delta T_J$	Breakdown Voltage Temperature Coefficient	$I_D=250\mu\text{A}, V_{GS}=0\text{V}$		0.56		$\text{V}/^\circ\text{C}$
$I_{DSS}$	Zero Gate Voltage Drain Current	$V_{DS}=500\text{V}, V_{GS}=0\text{V}$		1		$\mu\text{A}$
		$V_{DS}=400\text{V}, T_J=125^\circ\text{C}$		10		
$I_{GSS}$	Gate-Body leakage current	$V_{DS}=0\text{V}, V_{GS}=\pm 30\text{V}$			$\pm 100$	nA
$V_{GS(\text{th})}$	Gate Threshold Voltage	$V_{DS}=5\text{V}, I_D=250\mu\text{A}$	3.4	4	4.5	V
$R_{DS(\text{ON})}$	Static Drain-Source On-Resistance	$V_{GS}=10\text{V}, I_D=4\text{A}$		0.63	0.85	$\Omega$
$g_{FS}$	Forward Transconductance	$V_{DS}=40\text{V}, I_D=4\text{A}$		10		S
$V_{SD}$	Diode Forward Voltage	$I_S=1\text{A}, V_{GS}=0\text{V}$		0.73	1	V
$I_S$	Maximum Body-Diode Continuous Current				8	A
$I_{SM}$	Maximum Body-Diode Pulsed Current				30	A
<b>DYNAMIC PARAMETERS</b>						
$C_{iss}$	Input Capacitance	$V_{GS}=0\text{V}, V_{DS}=25\text{V}, f=1\text{MHz}$	694	868	1042	pF
$C_{oss}$	Output Capacitance		74	93	112	pF
$C_{rss}$	Reverse Transfer Capacitance		6.2	7.8	9.4	pF
$R_g$	Gate resistance	$V_{GS}=0\text{V}, V_{DS}=0\text{V}, f=1\text{MHz}$	2	4	6	$\Omega$
<b>SWITCHING PARAMETERS</b>						
$Q_g$	Total Gate Charge	$V_{GS}=10\text{V}, V_{DS}=400\text{V}, I_D=8\text{A}$		23.6	28	nC
$Q_{gs}$	Gate Source Charge			5.2	6.2	nC
$Q_{gd}$	Gate Drain Charge			10.6	12.7	nC
$t_{D(on)}$	Turn-On Delay Time	$V_{GS}=10\text{V}, V_{DS}=250\text{V}, I_D=8\text{A}, R_G=25\Omega$		19.5	24	ns
$t_r$	Turn-On Rise Time			47	56.4	ns
$t_{D(off)}$	Turn-Off Delay Time			51.5	62	ns
$t_f$	Turn-Off Fall Time			38.5	46	ns
$t_{rr}$	Body Diode Reverse Recovery Time	$I_F=8\text{A}, dI/dt=100\text{A}/\mu\text{s}, V_{DS}=100\text{V}$		206	247	ns
$Q_{rr}$	Body Diode Reverse Recovery Charge	$I_F=8\text{A}, dI/dt=100\text{A}/\mu\text{s}, V_{DS}=100\text{V}$		2.1	2.6	$\mu\text{C}$

A. The value of  $R_{JJA}$  is measured with the device in a still air environment with  $T_A=25^\circ\text{C}$ .

B. The power dissipation  $P_D$  is based on  $T_{J(\text{MAX})}=150^\circ\text{C}$ , using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.

C. Repetitive rating, pulse width limited by junction temperature  $T_{J(\text{MAX})}=150^\circ\text{C}$ . Ratings are based on low frequency and duty cycles to keep initial  $T_J=25^\circ\text{C}$ .

D. The  $R_{JJA}$  is the sum of the thermal impedance from junction to case  $R_{JJC}$  and case to ambient.

E. The static characteristics in Figures 1 to 6 are obtained using  $<300\mu\text{s}$  pulses, duty cycle 0.5% max.







F. These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of  $T_{J(\text{MAX})}=150^\circ\text{C}$ . The SOA curve provides a single pulse rating.






G. L=60mH,  $I_{AS}=3.2\text{A}$ ,  $V_{DD}=150\text{V}$ ,  $R_G=25\Omega$ , Starting  $T_J=25^\circ\text{C}$

APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO MAKE CHANGES TO PRODUCT SPECIFICATIONS WITHOUT NOTICE. IT IS THE RESPONSIBILITY OF THE CUSTOMER TO EVALUATE SUITABILITY OF THE PRODUCT FOR THEIR INTENDED APPLICATION. CUSTOMER SHALL COMPLY WITH APPLICABLE LEGAL REQUIREMENTS, INCLUDING ALL APPLICABLE EXPORT CONTROL RULES, REGULATIONS AND LIMITATIONS.

AOS' products are provided subject to AOS' terms and conditions of sale which are set forth at:

[http://www.aosmd.com/terms\\_and\\_conditions\\_of\\_sale](http://www.aosmd.com/terms_and_conditions_of_sale)

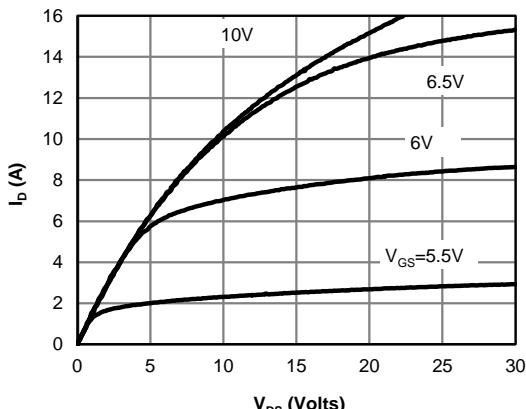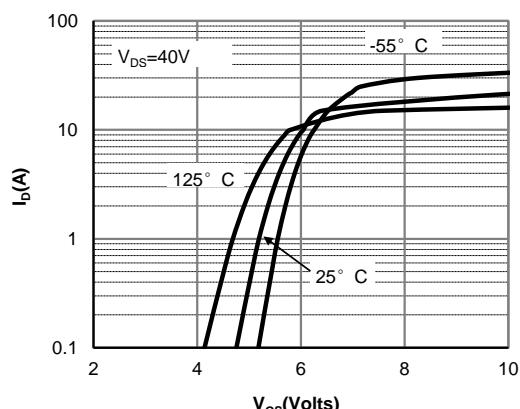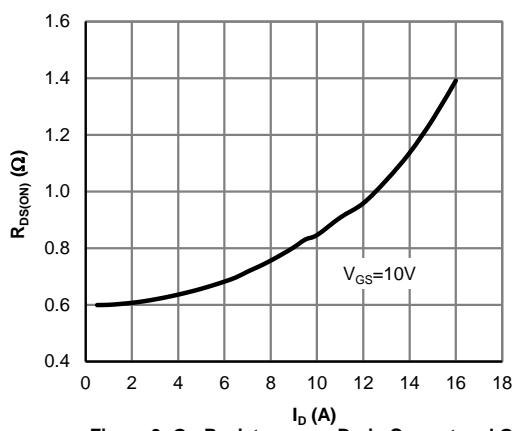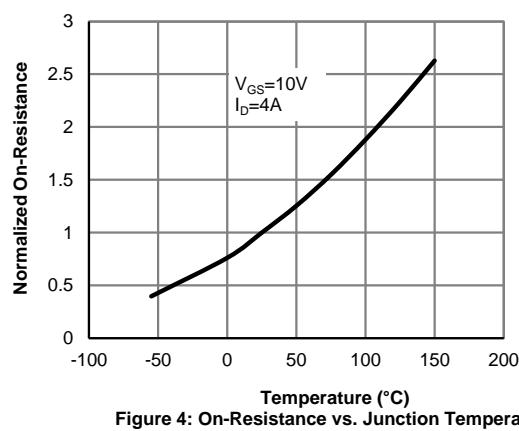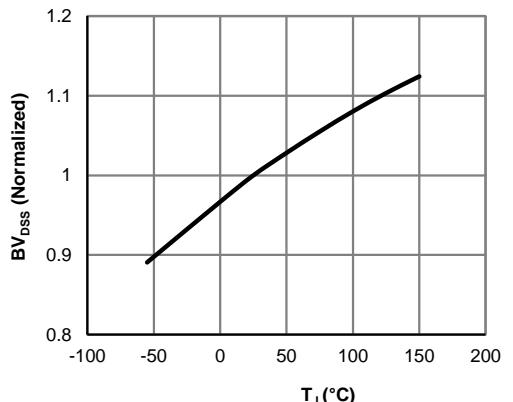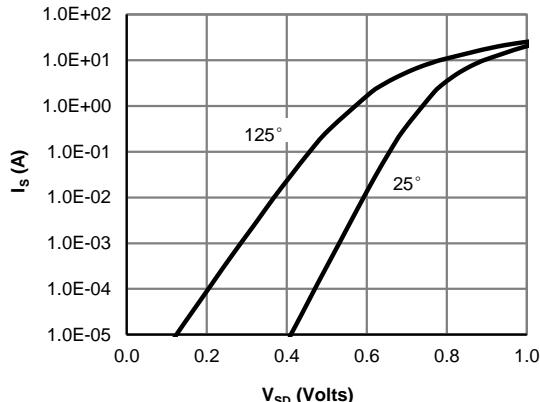**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**

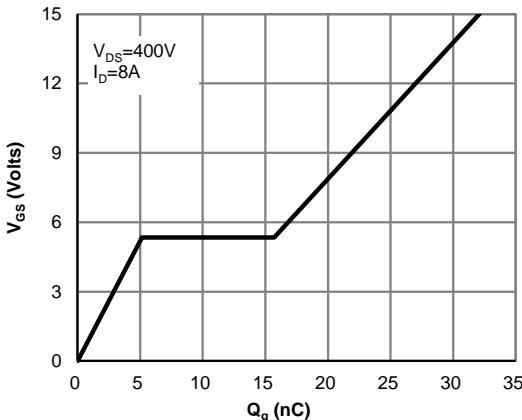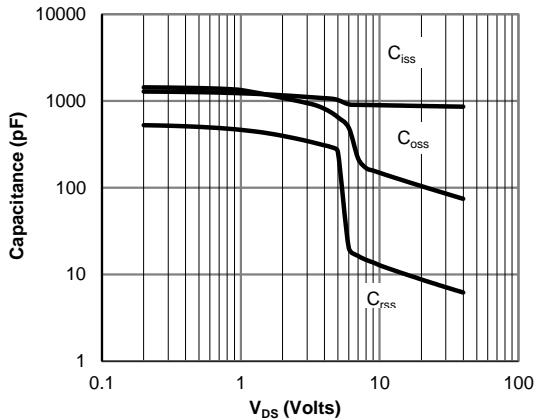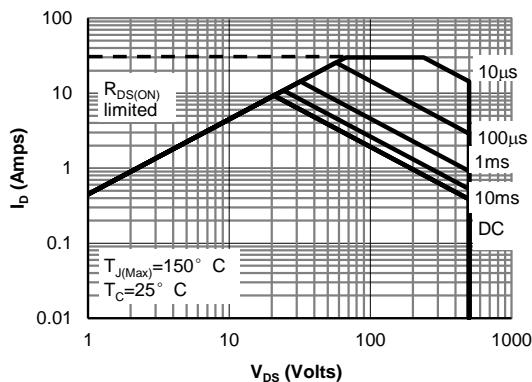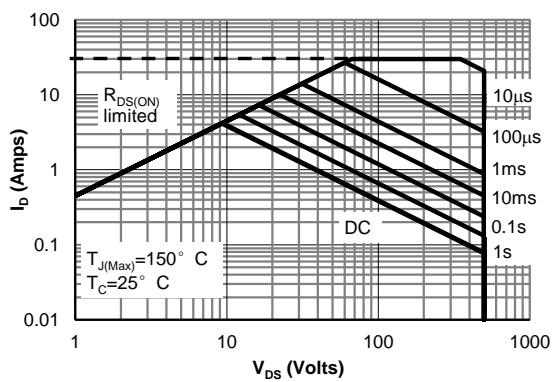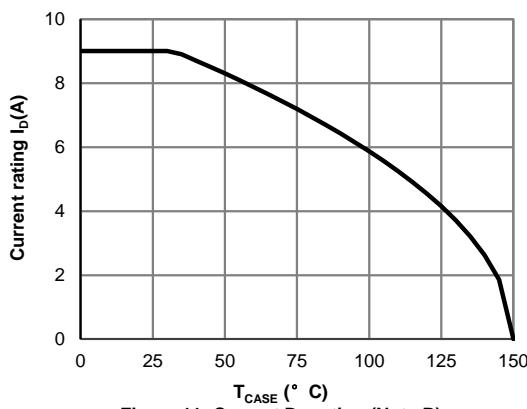**Figure 1: On-Region Characteristics**

**Figure 2: Transfer Characteristics**

**Figure 3: On-Resistance vs. Drain Current and Ga Voltage**

**Figure 4: On-Resistance vs. Junction Temperature**

**Figure 5: Break Down vs. Junction Temperature**

**Figure 6: Body-Diode Characteristics (Note E)**

**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**

**Figure 7: Gate-Charge Characteristics**

**Figure 8: Capacitance Characteristics**

**Figure 9: Maximum Forward Biased Safe Operating Area for AOT8N50 (Note F)**

**Figure 10: Maximum Forward Biased Safe Operating Area for AOTF8N50 (Note F)**

**Figure 11: Current De-rating (Note B)**

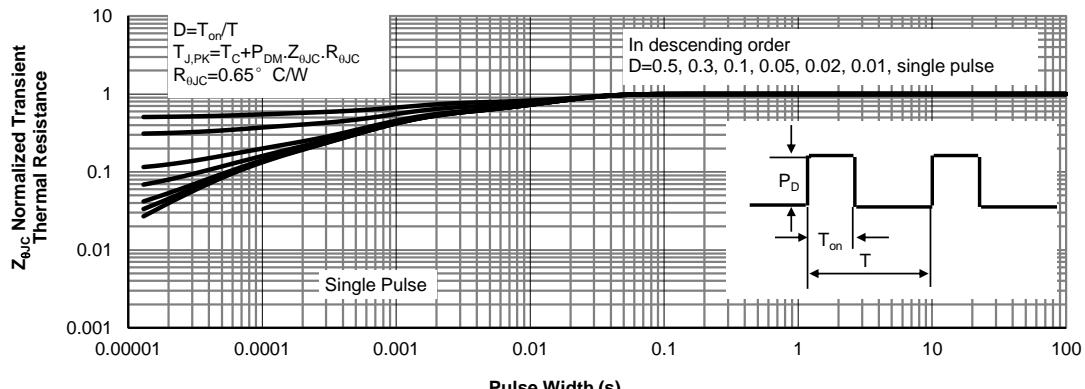
**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**


Figure 12: Normalized Maximum Transient Thermal Impedance for AOT8N50 (Note F)

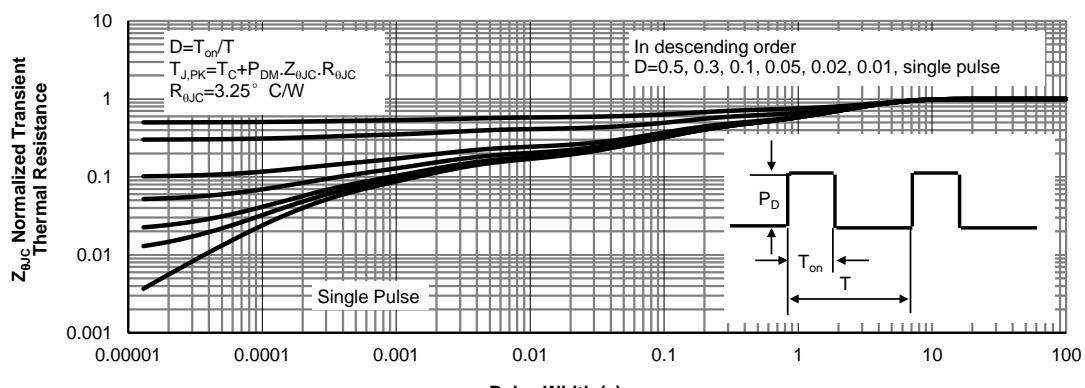
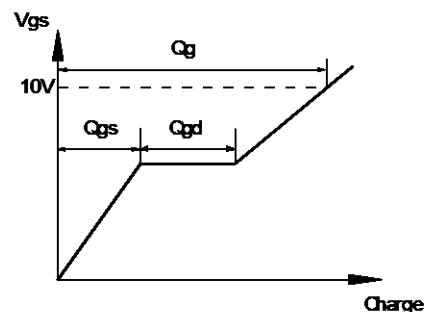
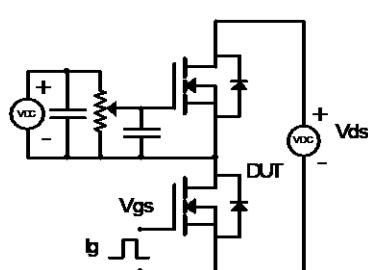
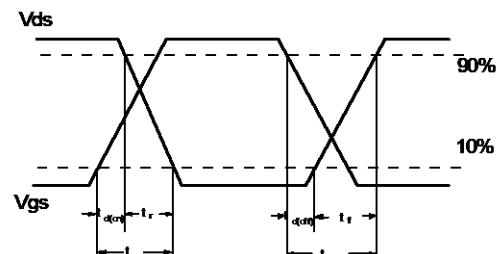
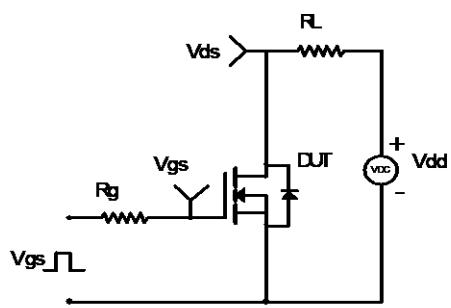
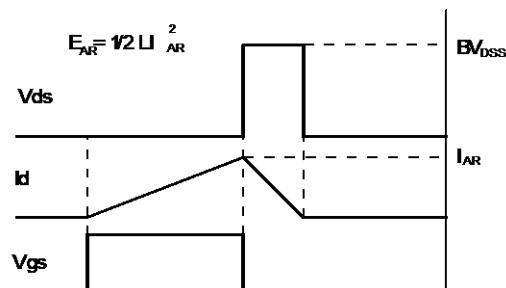
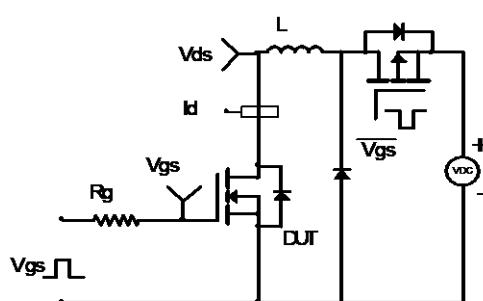


Figure 13: Normalized Maximum Transient Thermal Impedance for AOTF8N50 (Note F)

**Gate Charge Test Circuit & Waveform**

**Resistive Switching Test Circuit & Waveforms**

**Unclamped Inductive Switching (UIS) Test Circuit & Waveforms**

**Diode Recovery Test Circuit & Waveforms**
