

General Description

The AOZ8251BDI-16 is a single channel bi-directional transient voltage suppressor diode designed to protect data transmission lines from ESD.

This device incorporates two unidirectional TVS diodes in a single package. During transient conditions, the TVS diodes direct the transient energy to either the positive side of the data line or to ground.

The AOZ8251BDI-16 comes in a RoHS compliant and Halogen Free 0.62 mm x 0.32 mm x 0.3 mm package and is rated for -40°C to +125°C junction temperature range.

Features


- ESD protection for high-speed data lines:
 - IEC 61000-4-2 (ESD) ±15 kV (air), ±15 kV (contact)
 - Human Body Model (HBM) ±8 kV
 - IEC 61000-4-5 (Lightning) 1.2 A (8/20 μs)
- Protects four I/O lines
- Capacitance between I/O to GND: 3 pF
- Max. reverse working voltage: 16 V

Applications


- USB2.0 (Type-A, Type-B, Type-C)
- Mobile Phones
- Notebook Computers



Typical Application

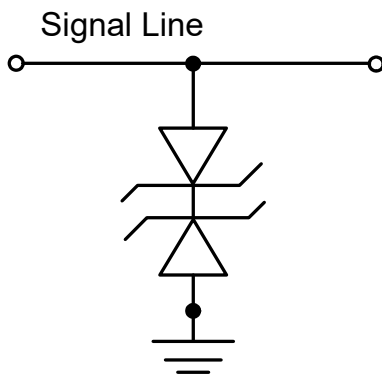

Pin Configuration

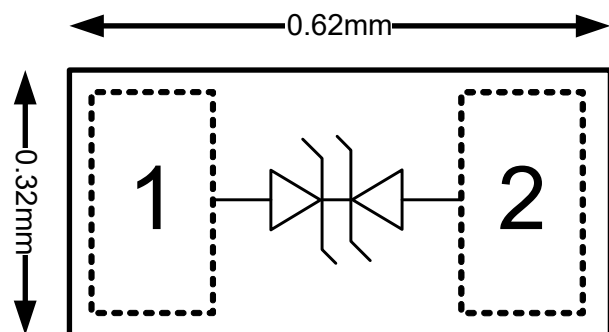

Ordering Information

Part Number	Ambient Temperature Range	Package	Environmental
AOZ8251BDI-16	-40°C to +125°C	DFN 0.62 x 0.32	Green Product



AOS Green Products use reduced levels of Halogens, and are also RoHS compliant. Please visit www.aosmd.com/media/AOSGreenPolicy.pdf for additional information.

Absolute Maximum Ratings

Exceeding the Absolute Maximum ratings may damage the device.

Parameter	Rating
Storage Temperature (T _S)	-65°C to +150°C
ESD Rating per IEC61000-4-2, Contact ⁽¹⁾	±15 kV
ESD Rating per IEC61000-4-2, Air ⁽¹⁾	±15 kV
ESD Rating per Human Body Model ⁽²⁾	±8 kV

Notes:


- IEC 61000-4-2 discharge with C_{Discharge} = 150 pF, R_{Discharge} = 330 Ω.
- Human Body Discharge per MIL-STD-883, Method 3015 C_{Discharge} = 100 pF, R_{Discharge} = 1.5 kΩ.

Maximum Operating Ratings

Parameter	Rating
Junction Temperature (T _J)	-40°C to +125°C

Electrical Characteristics

T_A = 25°C unless otherwise specified.

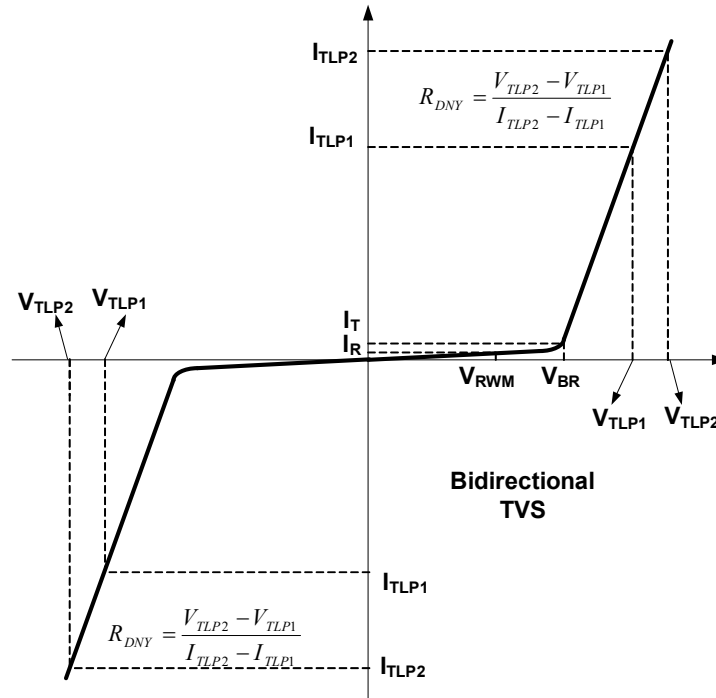

Symbol	Parameter	Condition	Min.	Typ.	Max.	Units
V _{RWM}	Reverse Working Voltage	I/O Pin-to-Ground			16	V
V _{BR}	Reverse Breakdown Voltage	I _T =100μA, I/O Pin-to-Ground	17	20	23	V
I _R	Reverse Leakage Current	Max. V _{RWM} , I/O Pin-to-Ground		1	100	nA
V _{CL}	Clamping Voltage ⁽³⁾⁽⁴⁾ (100ns Transmission Line Pulse, I/O Pin-to-Ground)	I _{TLP} =1A		21	25	V
		I _{TLP} =16A		28	32	V
R _{DNY}	Dynamic Resistance ⁽³⁾⁽⁴⁾	I _{TLP} =8A to 16A		0.4		Ω
I _{PP}	Peak Pulse Current ⁽³⁾ (IE61000-4-5 Surge 8/20μs)				1.2	A
V _{CL}	Clamping Voltage ⁽³⁾ (IE61000-4-5 Surge 8/20μs)	I _{PP} = 1A		26	31	V
		I _{PP} = 1.2A		27	32	
C _J	Junction Capacitance	V _{I/O} = 0V, f = 1MHz, I/O Pin-to-Ground		3	4.5	pF


Note:

- 3. These specifications are guaranteed by design and characterization.
- 4. Measurements performed using 100ns Transmission Line Pulse (TLP) system.


Typical Performance Characteristics

$T_A = 25^\circ\text{C}$, unless otherwise specified.


TLP Clamping Curve
($t_r=1\text{ns}$, $t_p=100\text{ns}$)

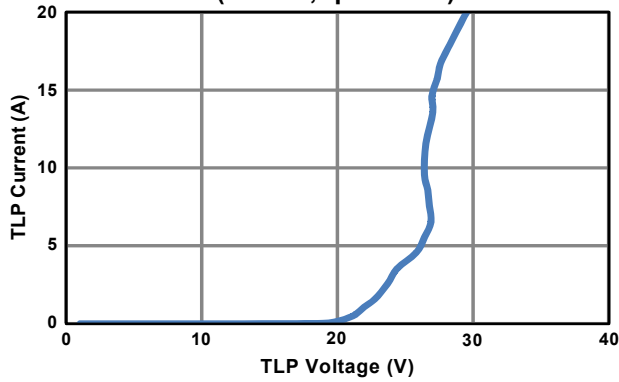


Typical Variations of CJ vs. Input Voltage

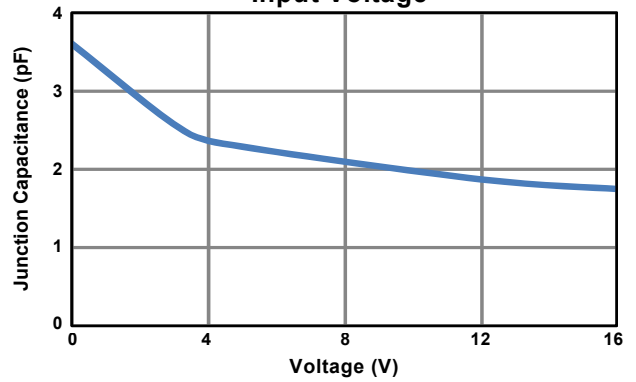

+8kV ESD Clamping per IEC 61000-4-2
(Connection between IO to GND)

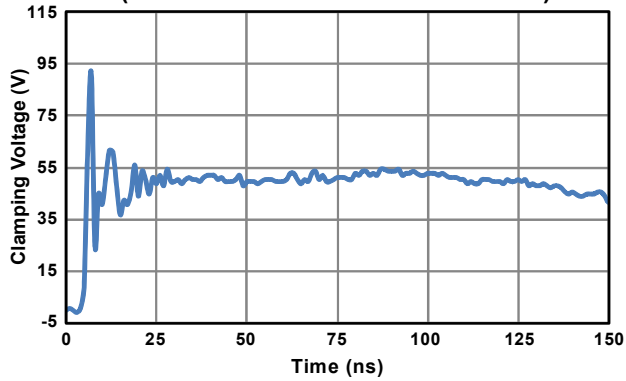

-8kV ESD Clamping per IEC 61000-4-2
(Connection between IO to GND)

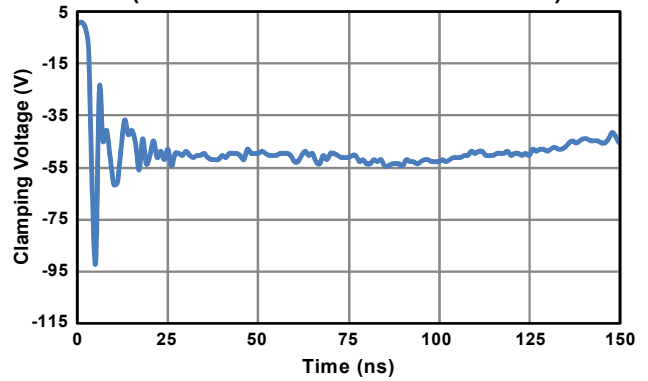

LEGAL DISCLAIMER

Applications or uses as critical components in life support devices or systems are not authorized. AOS does not assume any liability arising out of such applications or uses of its products. AOS reserves the right to make changes to product specifications without notice. It is the responsibility of the customer to evaluate suitability of the product for their intended application. Customer shall comply with applicable legal requirements, including all applicable export control rules, regulations and limitations.

AOS' products are provided subject to AOS' terms and conditions of sale which are set forth at:

http://www.aosmd.com/terms_and_conditions_of_sale

LIFE SUPPORT POLICY

ALPHA & OMEGA SEMICONDUCTOR PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.