

General Description


- 650V breakdown voltage
- Low forward voltage (VF)
- Very fast recovery
- Low reverse recovery charge
- Low reverse recovery current
- 175°C operating junction temperature

Applications


- AC/DC converters
- Boost diode in PFC stages
- Free wheeling diodes in inverters and motor drives
- General purpose inverters
- Switch mode power supplies

Product Summary

V_{BR}	650V
I_F ($T_C=100^\circ\text{C}$)	40A
V_F ($T_J=25^\circ\text{C}$)	1.5V



- Pin1-not connected
- Pin2-cathode
- Pin3-anode



Orderable Part Number	Package Type	Form	Minimum Order Quantity
AOGF40D65L1L	TO3PF	Tube	480

Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	AOGF40D65L1L	Units
Repetitive peak reverse voltage	V_{RRM}	650	V
Continuous Diode Forward Current	I_F	$T_C=25^\circ\text{C}$	80 ⁽¹⁾
		$T_C=100^\circ\text{C}$	40 ⁽¹⁾
Diode Pulsed Current, Limited by T_{Jmax}	I_{FM}	120	A
Power Dissipation	P_D	$T_C=25^\circ\text{C}$	75
		$T_C=100^\circ\text{C}$	38
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 175	$^\circ\text{C}$
Maximum Lead Temperature for Soldering Purpose, 1/8" from case for 5 seconds	T_L	300	$^\circ\text{C}$

Thermal Characteristics

Parameter	Symbol	AOGF40D65L1L	Units
Maximum Junction-to-Ambient	$R_{\theta JA}$	30	$^\circ\text{C}/\text{W}$
Maximum Diode Junction-to-Case	$R_{\theta JC}$	2	$^\circ\text{C}/\text{W}$

(1) TO3PF I_F follows TO247.

Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units	
STATIC PARAMETERS							
V _{BR}	Breakdown voltage	I _R =1mA, T _J =25°C	650	-	-	V	
V _F	Diode Forward Voltage	I _F =40A	T _J =25°C	-	1.5	1.9	V
			T _J =125°C	-	1.59	-	
			T _J =175°C	-	1.53	-	
I _R	Reverse Leakage Current	V _{BR} =650V	T _J =25°C	-	-	10	μA
			T _J =125°C	-	-	1000	
			T _J =175°C	-	-	10000	
SWITCHING PARAMETERS, (Load Inductive, T_J=25°C)							
t _{rr}	Diode Reverse Recovery Time	T _J =25°C	-	126	-	ns	
Q _{rr}	Diode Reverse Recovery Charge	I _F =40A, di/dt=200A/μs, V _{CC} =400V	-	0.58	-	μC	
I _{rm}	Diode Peak Reverse Recovery Current	Include IGBT AOK40B65H2AL	-	8	-	A	
SWITCHING PARAMETERS, (Load Inductive, T_J=175°C)							
t _{rr}	Diode Reverse Recovery Time	T _J =175°C	-	197	-	ns	
Q _{rr}	Diode Reverse Recovery Charge	I _F =40A, di/dt=200A/μs, V _{CC} =400V	-	1.8	-	μC	
I _{rm}	Diode Peak Reverse Recovery Current	Include IGBT AOK40B65H2AL	-	14	-	A	

APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO MAKE CHANGES TO PRODUCT SPECIFICATIONS WITHOUT NOTICE. IT IS THE RESPONSIBILITY OF THE CUSTOMER TO EVALUATE SUITABILITY OF THE PRODUCT FOR THEIR INTENDED APPLICATION. CUSTOMER SHALL COMPLY WITH APPLICABLE LEGAL REQUIREMENTS, INCLUDING ALL APPLICABLE EXPORT CONTROL RULES, REGULATIONS AND LIMITATIONS.

AOS' products are provided subject to AOS' terms and conditions of sale which are set forth at:
http://www.aosmd.com/terms_and_conditions_of_sale

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

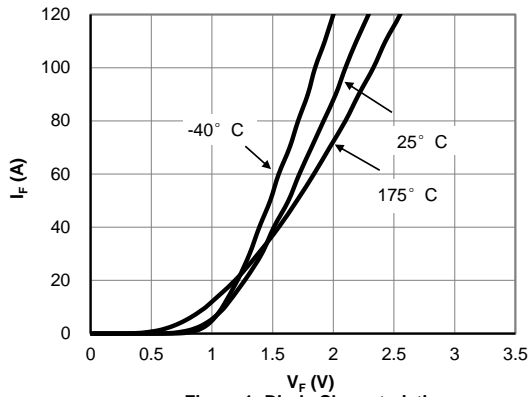


Figure 1: Diode Characteristic

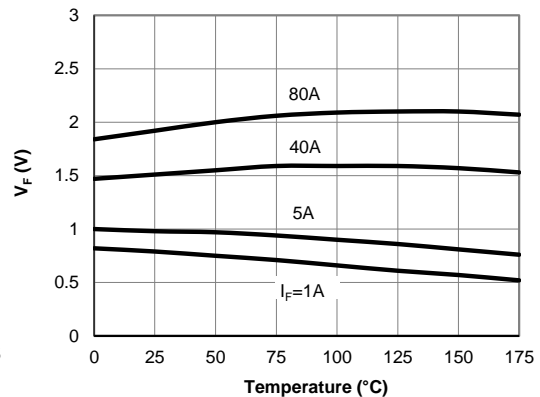


Figure 2: Diode Forward voltage vs. Junction Temperature

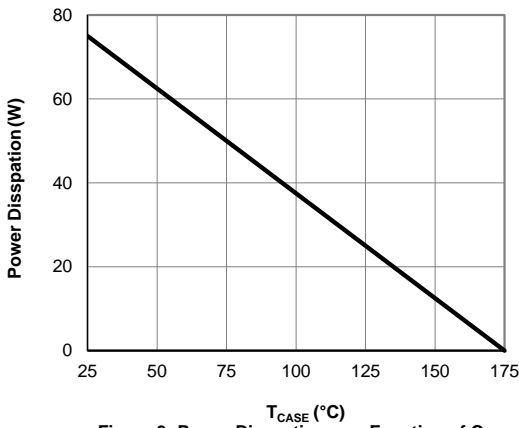


Figure 3: Power Dissipation as a Function of Case

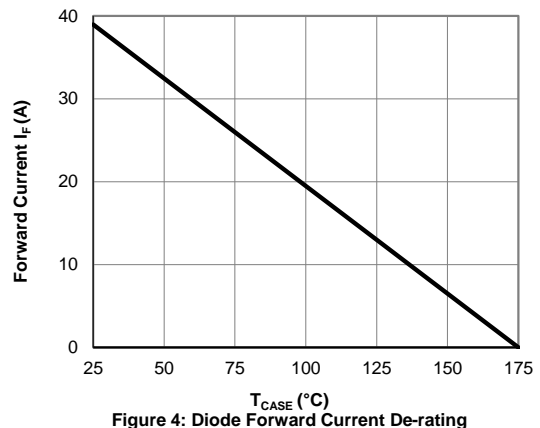


Figure 4: Diode Forward Current De-rating

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

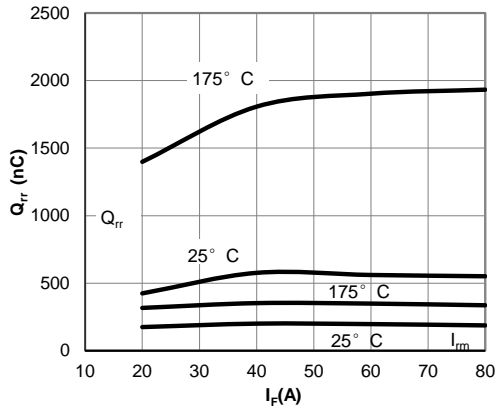


Figure 5: Diode Reverse Recovery Charge and Peak Current vs. Conduction Current
($V_{GE}=15V, V_{CE}=400V, di/dt=200A/\mu s$)

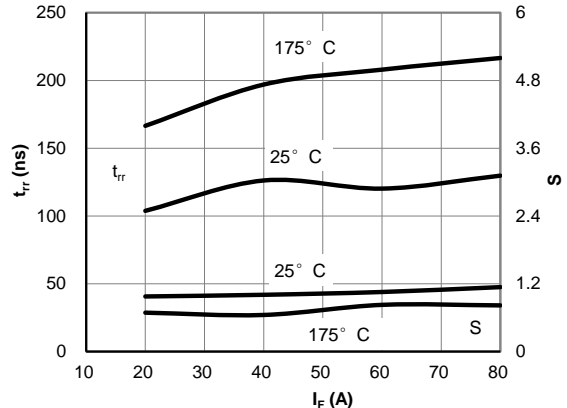


Figure 6: Diode Reverse Recovery Time and Softness Factor vs. Conduction Current
($V_{GE}=15V, V_{CE}=400V, di/dt=200A/\mu s$)

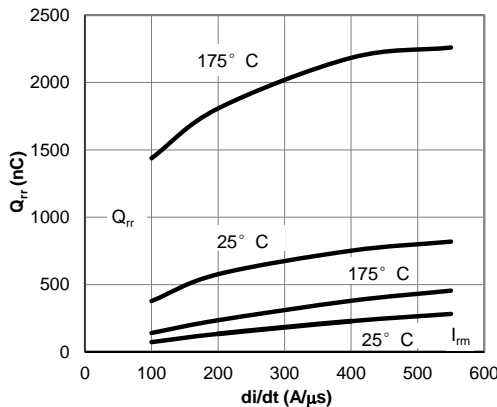


Figure 7: Diode Reverse Recovery Charge and Peak Current vs. di/dt
($V_{GE}=15V, V_{CE}=400V, I_F=40A$)

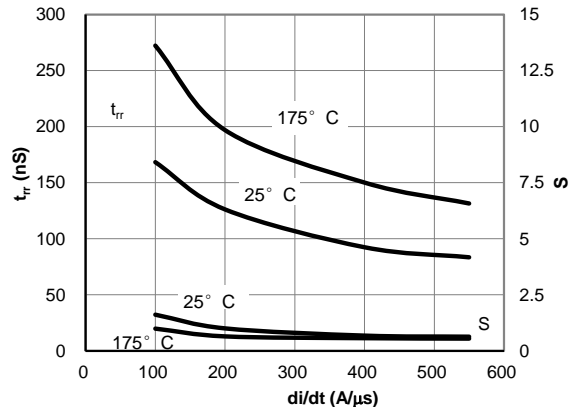


Figure 8: Diode Reverse Recovery Time and Softness Factor vs. di/dt
($V_{GE}=15V, V_{CE}=400V, I_F=40A$)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

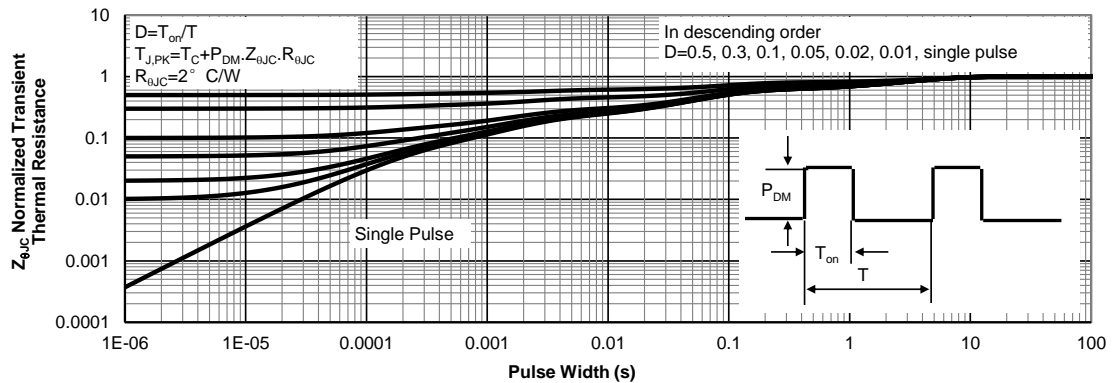


Figure 9: Normalized Maximum Transient Thermal Impedance for Diode

Diode Recovery Test Circuit & Waveforms

