



ALPHA & OMEGA
SEMICONDUCTOR

AON6312
30V N-Channel MOSFET

General Description

- Trench Power MOSFET technology
- Low $R_{DS(ON)}$
- Low Gate Charge
- High Current Capability
- RoHS and Halogen-Free Compliant

Product Summary

| | |
|----------------------------------|----------|
| V_{DS} | 30V |
| I_D (at $V_{GS}=10V$) | 130A |
| $R_{DS(ON)}$ (at $V_{GS}=10V$) | < 1.85mΩ |
| $R_{DS(ON)}$ (at $V_{GS}=4.5V$) | < 2.5mΩ |

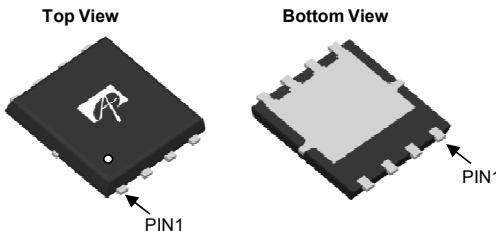
100% UIS Tested
100% R_g Tested



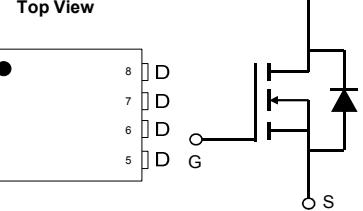

Applications

- DC/DC Converters in Computing
- Isolated DC/DC Converters in Telecom and Industrial
- See Note I

DFN5x6



Top View



Orderable Part Number

AON6312

Package Type

DFN 5x6

Form

Tape & Reel

Minimum Order Quantity

3000

Absolute Maximum Ratings $T_A=25^\circ C$ unless otherwise noted

| Parameter | Symbol | Maximum | Units |
|--|----------------|------------|-------|
| Drain-Source Voltage | V_{DS} | 30 | V |
| Gate-Source Voltage | V_{GS} | ± 20 | V |
| Continuous Drain Current $T_C=25^\circ C$ | I_D | 130 | A |
| | | 83 | |
| Pulsed Drain Current ^C | I_{DM} | 260 | |
| Continuous Drain Current $T_A=25^\circ C$ | I_{DSM} | 46 | A |
| | | 37 | |
| Avalanche Current ^C | I_{AS} | 80 | A |
| Avalanche energy $L=0.01mH$ ^C | E_{AS} | 32 | mJ |
| Drain-to-Source Spike $t=10\mu s$ | V_{SPIKE} | 36 | V |
| Power Dissipation ^B $T_C=25^\circ C$ | P_D | 50 | W |
| | | 20 | |
| Power Dissipation ^A $T_A=25^\circ C$ | P_{DSM} | 6.2 | W |
| | | 4 | |
| Junction and Storage Temperature Range | T_J, T_{STG} | -55 to 150 | °C |

Thermal Characteristics

| Parameter | Symbol | Typ | Max | Units |
|--|-----------------|-----|-----|-------|
| Maximum Junction-to-Ambient ^A $t \leq 10s$ | $R_{\theta JA}$ | 15 | 20 | °C/W |
| Maximum Junction-to-Ambient ^{A,D} Steady-State | | 40 | 50 | °C/W |
| Maximum Junction-to-Case Steady-State | $R_{\theta JC}$ | 1.9 | 2.5 | °C/W |

Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise noted)

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|-----------------------------|---------------------------------------|--|-----|------|-----------|------------------|
| STATIC PARAMETERS | | | | | | |
| BV_{DSS} | Drain-Source Breakdown Voltage | $\text{ID}=250\mu\text{A}, \text{VGS}=0\text{V}$ | 30 | | | V |
| I_{DSS} | Zero Gate Voltage Drain Current | $\text{V}_{\text{DS}}=30\text{V}, \text{V}_{\text{GS}}=0\text{V}$ $T_J=55^\circ\text{C}$ | | 1 | 5 | μA |
| I_{GSS} | Gate-Body leakage current | $\text{V}_{\text{DS}}=0\text{V}, \text{V}_{\text{GS}}=\pm 20\text{V}$ | | | ± 100 | nA |
| $\text{V}_{\text{GS(th)}}$ | Gate Threshold Voltage | $\text{V}_{\text{DS}}=\text{V}_{\text{GS}}, \text{I}_{\text{D}}=250\mu\text{A}$ | 1.3 | 1.75 | 2.2 | V |
| $\text{R}_{\text{DS(ON)}}$ | Static Drain-Source On-Resistance | $\text{V}_{\text{GS}}=10\text{V}, \text{I}_{\text{D}}=20\text{A}$ $T_J=125^\circ\text{C}$ | | 1.5 | 1.85 | $\text{m}\Omega$ |
| | | $\text{V}_{\text{GS}}=4.5\text{V}, \text{I}_{\text{D}}=20\text{A}$ | | 2.0 | 2.45 | $\text{m}\Omega$ |
| g_{FS} | Forward Transconductance | $\text{V}_{\text{DS}}=5\text{V}, \text{I}_{\text{D}}=20\text{A}$ | | 125 | | S |
| V_{SD} | Diode Forward Voltage | $\text{I}_{\text{S}}=1\text{A}, \text{V}_{\text{GS}}=0\text{V}$ | | 0.68 | 1 | V |
| I_{S} | Maximum Body-Diode Continuous Current | | | | 60 | A |
| DYNAMIC PARAMETERS | | | | | | |
| C_{iss} | Input Capacitance | $\text{V}_{\text{GS}}=0\text{V}, \text{V}_{\text{DS}}=15\text{V}, \text{f}=1\text{MHz}$ | | 3100 | | pF |
| C_{oss} | Output Capacitance | | | 875 | | pF |
| C_{rss} | Reverse Transfer Capacitance | | | 105 | | pF |
| R_g | Gate resistance | $\text{f}=1\text{MHz}$ | 1.1 | 2.3 | 3.5 | Ω |
| SWITCHING PARAMETERS | | | | | | |
| $\text{Q}_g(10\text{V})$ | Total Gate Charge | $\text{V}_{\text{GS}}=10\text{V}, \text{V}_{\text{DS}}=15\text{V}, \text{I}_{\text{D}}=20\text{A}$ | | 43 | 65 | nC |
| $\text{Q}_g(4.5\text{V})$ | Total Gate Charge | | | 20 | 30 | nC |
| Q_{gs} | Gate Source Charge | | | 8.5 | | nC |
| Q_{gd} | Gate Drain Charge | | | 6 | | nC |
| $t_{\text{D(on)}}$ | Turn-On DelayTime | $\text{V}_{\text{GS}}=10\text{V}, \text{V}_{\text{DS}}=15\text{V}, \text{R}_L=0.75\Omega, \text{R}_{\text{GEN}}=3\Omega$ | | 11.5 | | ns |
| t_r | Turn-On Rise Time | | | 5 | | ns |
| $t_{\text{D(off)}}$ | Turn-Off DelayTime | | | 40 | | ns |
| t_f | Turn-Off Fall Time | | | 8 | | ns |
| t_{rr} | Body Diode Reverse Recovery Time | $\text{I}_{\text{F}}=20\text{A}, \text{di/dt}=500\text{A}/\mu\text{s}$ | | 17 | | ns |
| Q_{rr} | Body Diode Reverse Recovery Charge | $\text{I}_{\text{F}}=20\text{A}, \text{di/dt}=500\text{A}/\mu\text{s}$ | | 36 | | nC |

A. The value of R_{QJA} is measured with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{C}$. The Power dissipation P_{DSM} is based on $R_{\text{QJA}} \leq 10\text{s}$ and the maximum allowed junction temperature of 150°C . The value in any given application depends on the user's specific board design.

B. The power dissipation P_D is based on $T_{J(\text{MAX})}=150^\circ\text{C}$, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.

C. Single pulse width limited by junction temperature $T_{J(\text{MAX})}=150^\circ\text{C}$.

D. The R_{QJA} is the sum of the thermal impedance from junction to case R_{QJC} and case to ambient.

E. The static characteristics in Figures 1 to 6 are obtained using <300 μs pulses, duty cycle 0.5% max.

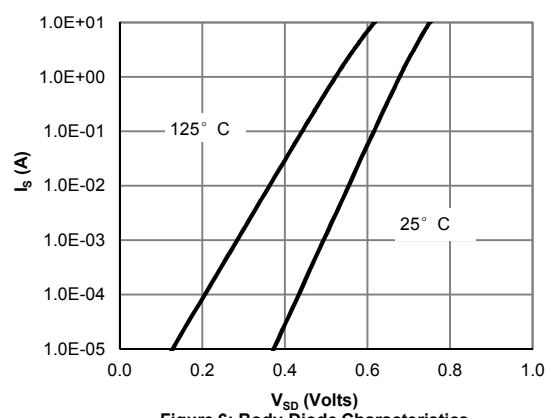
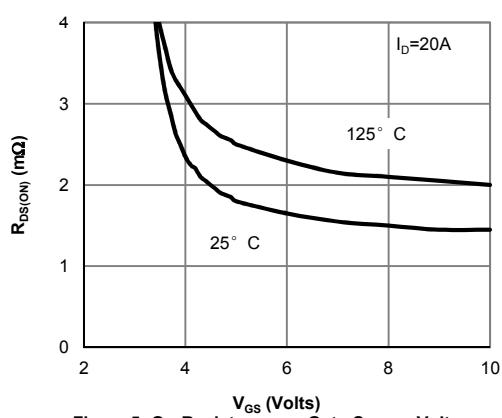
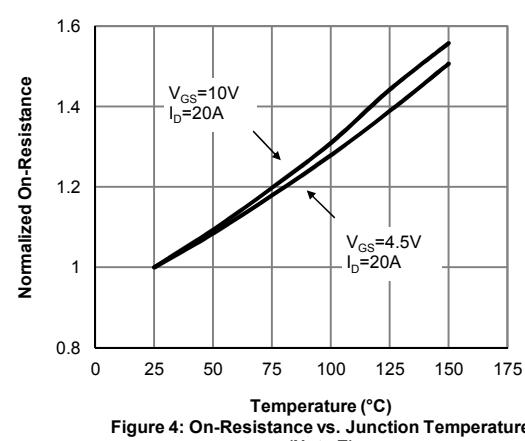
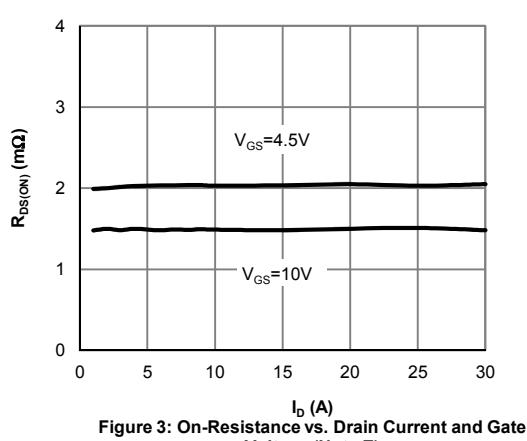
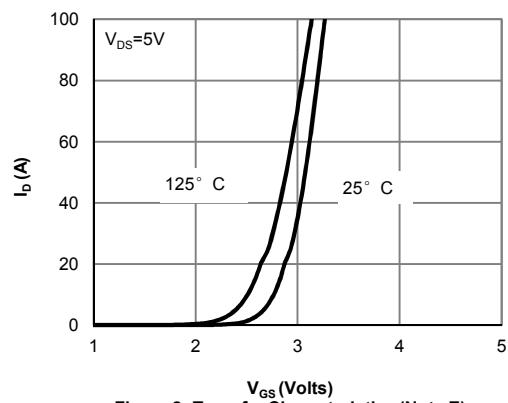
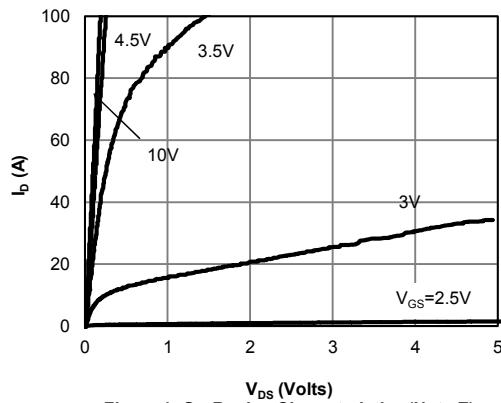
F. These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of $T_{J(\text{MAX})}=150^\circ\text{C}$. The SOA curve provides a single pulse rating.

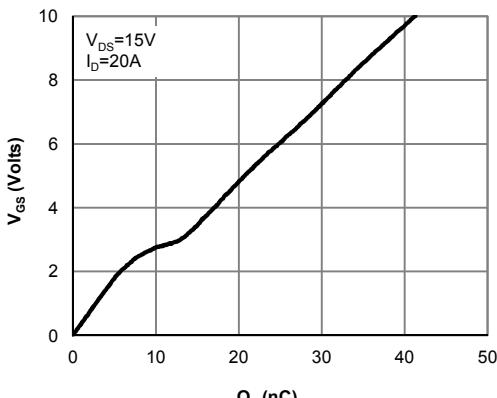
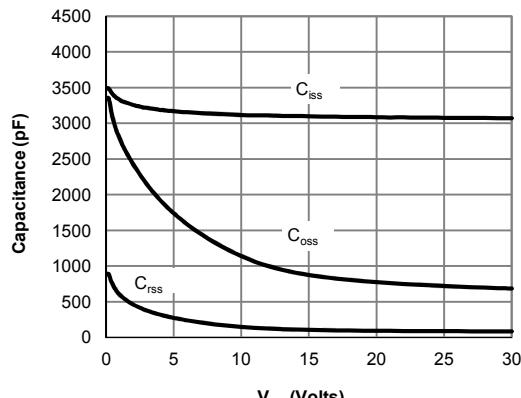
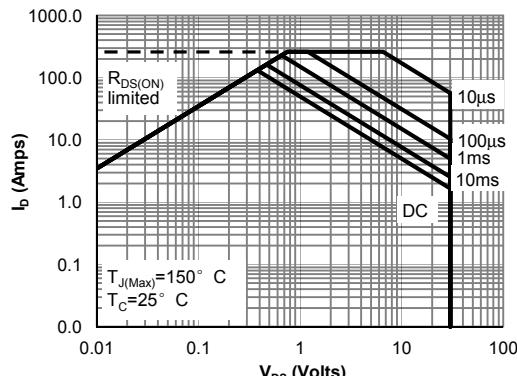
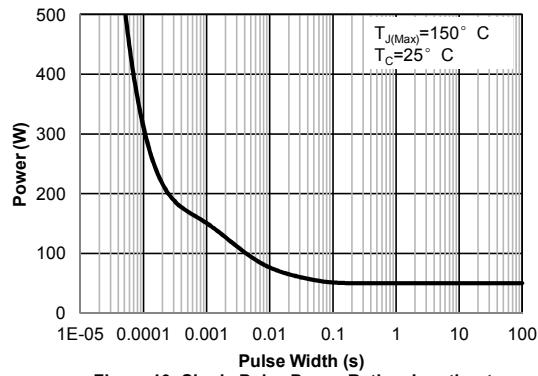
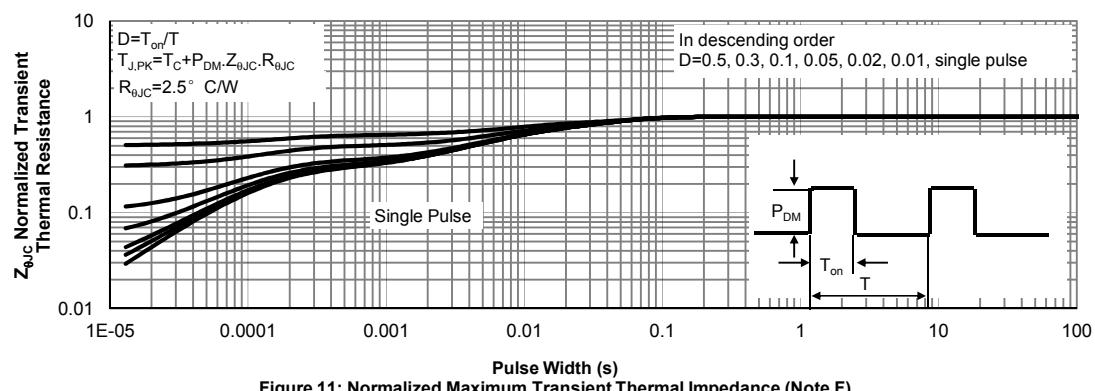
G. The maximum current rating is package limited.

H. These tests are performed with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{C}$.

I. For application requiring slow >1ms turn-on/turn-off, please consult AOS FAE for proper product selection.

APPLICATIONS OR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS


TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

Figure 7: Gate-Charge Characteristics

Figure 8: Capacitance Characteristics

Figure 9: Maximum Forward Biased Safe Operating Area (Note F)

Figure 10: Single Pulse Power Rating Junction-to-Case (Note F)

Figure 11: Normalized Maximum Transient Thermal Impedance (Note F)

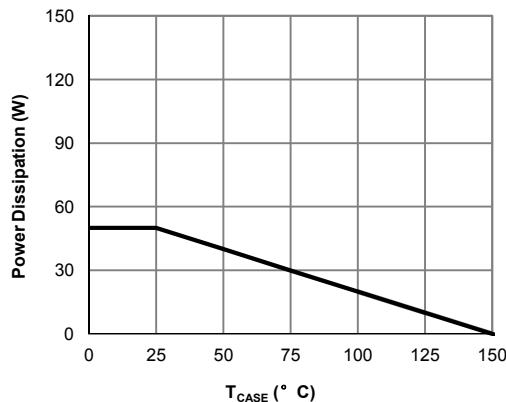
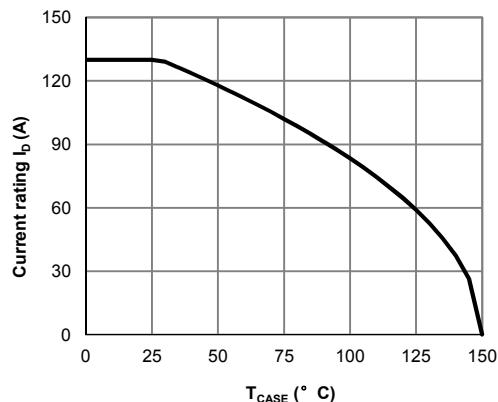
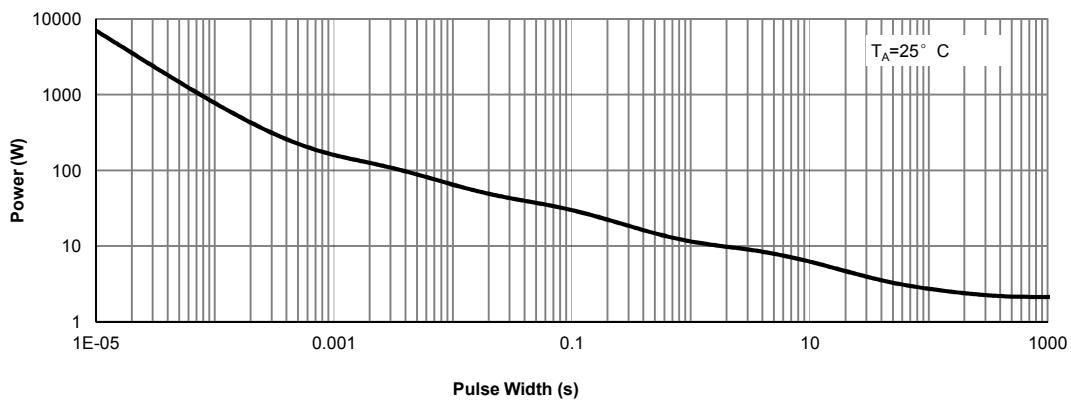
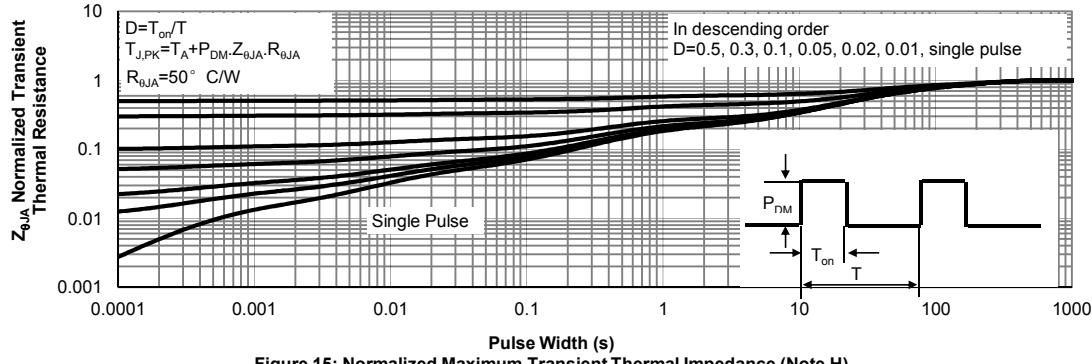
TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

Figure 12: Power De-rating (Note F)

Figure 13: Current De-rating (Note F)

Figure 14: Single Pulse Power Rating Junction-to-Ambient (Note H)

Figure 15: Normalized Maximum Transient Thermal Impedance (Note H)

Figure A: Gate Charge Test Circuit & Waveforms

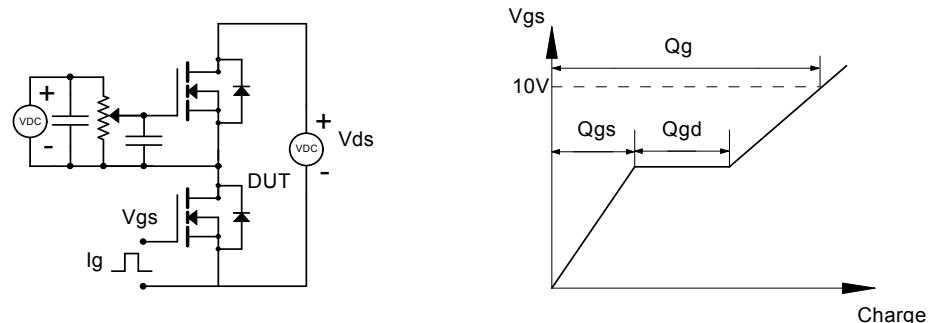


Figure B: Resistive Switching Test Circuit & Waveforms

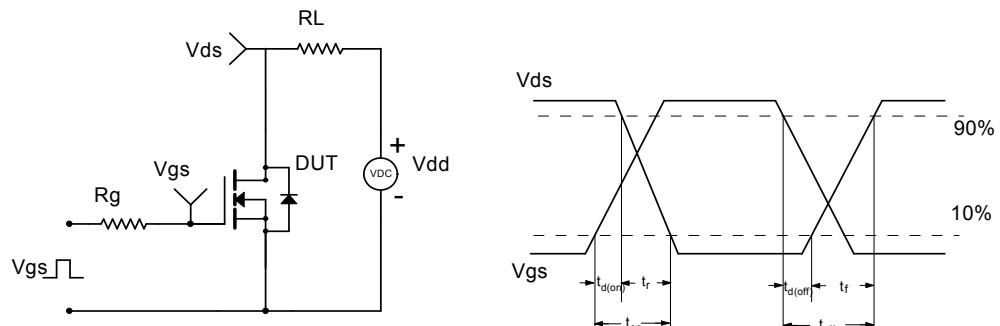


Figure C: Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

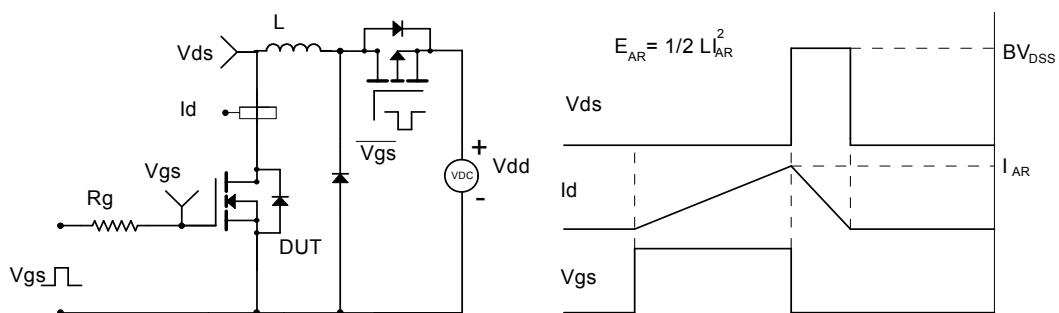


Figure D: Diode Recovery Test Circuit & Waveforms

