






DFN3x2A_14L_EP1_S PACKAGE OUTLINE

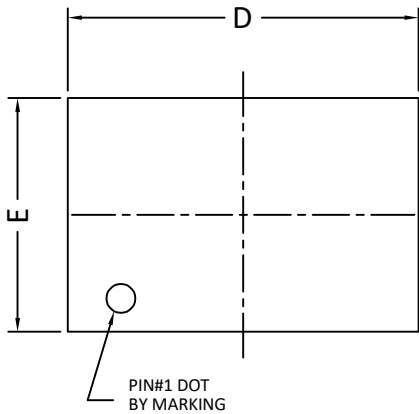


TOP VIEW



SIDE VIEW

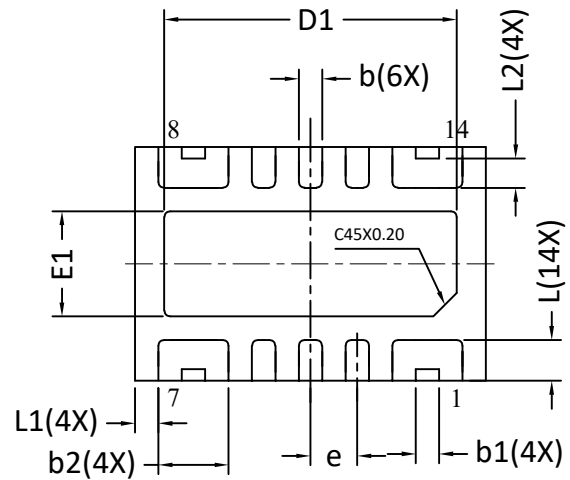


BOTTOM VIEW

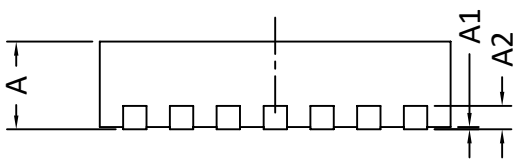

SIDE VIEW

RECOMMENDED LAND PATTERN

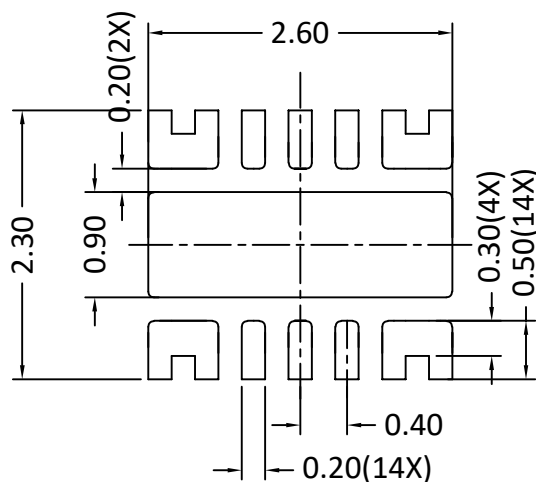

UNIT: mm

SYMBOLS	DIM. IN MM			DIM. IN INCH		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	0.700	0.750	0.800	0.028	0.030	0.031
A1	0.000	-	0.050	0.000	-	0.002
A2	0.2REF			0.008REF		
E	1.900	2.000	2.100	0.075	0.079	0.083
E1	0.800	0.900	1.000	0.031	0.035	0.039
D	2.900	3.000	3.100	0.114	0.118	0.122
D1	2.400	2.500	2.600	0.094	0.098	0.102
L	0.300	0.350	0.400	0.012	0.014	0.016
L1	0.150	0.200	0.250	0.006	0.008	0.010
L2	0.200	0.250	0.300	0.008	0.010	0.012
b	0.150	0.200	0.250	0.006	0.008	0.010
b1	0.150	0.200	0.250	0.006	0.008	0.010
b2	0.550	0.600	0.650	0.022	0.024	0.026
e	0.40BSC			0.016BSC		

NOTE

1. CONTROLLING DIMENSION IS MILLIMETER.
CONVERTED INCH DIMENSIONS ARE NOT NECESSARILY EXACT.
2. TOLERANCE :±0.05 UNLESS OTHERWISE SPECIFIED.
3. RADIUS ON ALL CORNER ARE 0.152 MAX., UNLESS OTHERWISE SPECIFIED.
4. PACKAGE WARPAGE: 0.012 MAX.
5. NO ANY PLASTIC FLASH ALLOWED ON THE TOP AND BOTTOM LEAD SURFACE.
6. PAD PLANARITY: ±0.102
7. CRACK BETWEEN PLASTIC BODY AND LEAD IS NOT ALLOWED.