




## DFN3x2\_10L\_EP3\_S PACKAGE OUTLINE

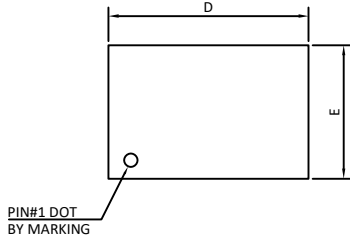

TOP VIEW




Option 1

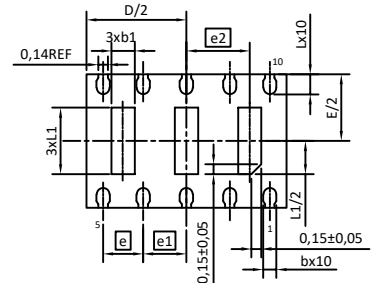


Option 2

BOTTOM VIEW



SIDE VIEW

### recommended land pattern

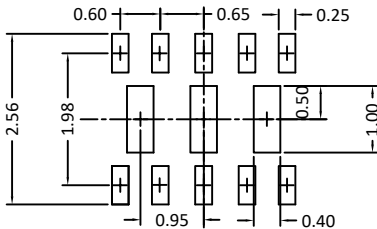

SYMBOLS	DIM. IN MM			DIM. IN INCH		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	0.500	0.550	0.600	0.020	0.022	0.024
A1	0.000	-	0.050	0.000	-	0.002
A2	-	0.15Ref	-	-	0.006Ref	-
b	0.150	0.200	0.250	0.006	0.008	0.010
b1	0.250	0.350	0.450	0.010	0.014	0.018
D	2.900	3.000	3.100	0.116	0.120	0.124
E	1.900	2.000	2.100	0.076	0.080	0.084
e	0.60BSC			0.024BSC		
e1	0.65BSC			0.026BSC		
e2	0.95BSC			0.038BSC		
L	0.250	0.300	0.350	0.010	0.012	0.014
L1	0.950	1.000	1.050	0.038	0.040	0.042

UNIT: mm

### NOTE

1. CONTROLLING DIMENSION IS MILLIMETER.  
CONVERTED INCH DIMENSIONS ARE NOT NECESSARILY EXACT.
2. TOLERANCE :±0.05 UNLESS OTHERWISE SPECIFIED.
3. RADIUS ON ALL CORNER ARE 0.152 MAX., UNLESS OTHERWISE SPECIFIED.
4. PACKAGE WARPAGE: 0.012 MAX.
5. NO ANY PLASTIC FLASH ALLOWED ON THE TOP AND BOTTOM LEAD SURFACE.
6. PAD PLANARITY: ±0.102
7. CRACK BETWEEN PLASTIC BODY AND LEAD IS NOT ALLOWED.