






DFN5x6F_8L_EP2_S PACKAGE OUTLINE

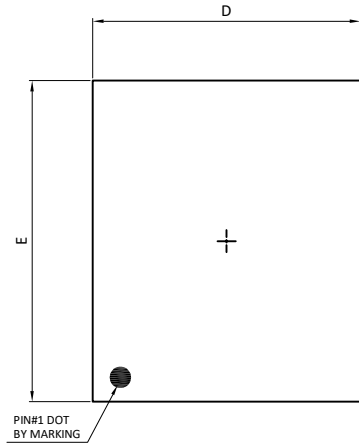

TOP VIEW

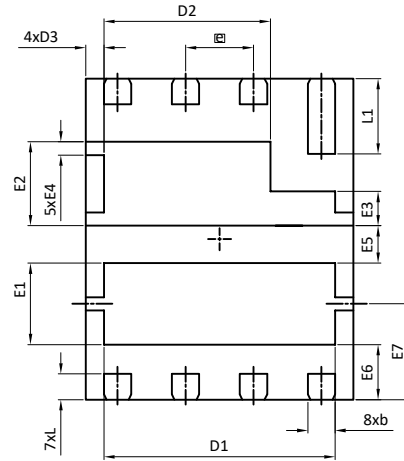


BOTTOM VIEW



SIDE VIEW

RECOMMENDED LAND PATTERN

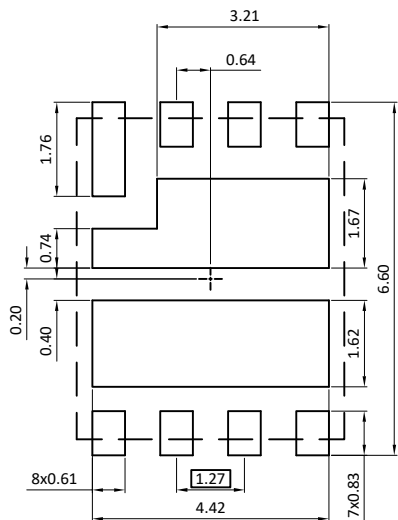

UNIT: mm

SYMBOL	DIMENSIONS IN MILLIMETERS			DIMENSIONS IN INCHS		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	0.70	0.75	0.80	0.028	0.030	0.032
A1	0.00	0.02	0.05	0.000	0.001	0.002
A2	0.20	0.25	0.30	0.008	0.010	0.012
D	4.90	5.00	5.10	0.193	0.197	0.201
E	5.90	6.00	6.10	0.232	0.236	0.240
D1	4.22	4.32	4.42	0.166	0.170	0.174
D2	3.01	3.11	3.21	0.119	0.122	0.126
D3	0.24	0.34	0.44	0.009	0.013	0.017
E1	1.42	1.52	1.62	0.056	0.060	0.064
E2	1.47	1.57	1.67	0.058	0.062	0.066
E3	0.54	0.64	0.74	0.021	0.025	0.029
E4	0.20	0.25	0.30	0.008	0.010	0.012
E5	0.60	0.70	0.80	0.024	0.028	0.031
E6	0.93	1.03	1.13	0.037	0.041	0.044
E7	1.69	1.79	1.89	0.067	0.070	0.074
L	0.38	0.48	0.58	0.015	0.019	0.023
L1	1.31	1.41	1.51	0.052	0.056	0.059
e	1.27BSC			0.05BSC		
b	0.41	0.51	0.61	0.016	0.020	0.024

NOTE:

1. CONTROLLING DIMENSION IS MILLIMETER.
CONVERTED INCH DIMENSIONS ARE NOT NECESSARILY EXACT.
2. THIS PACKAGE WAS QUALIFIED USING IR REFLOW PROCESS (JEDEC STANDARD). FOR USAGE IN OTHER SOLDERING PROCESSES, PLEASE CONTACT LOCAL AOS REPRESENTATIVES.