






GLPAK PACKAGE OUTLINE

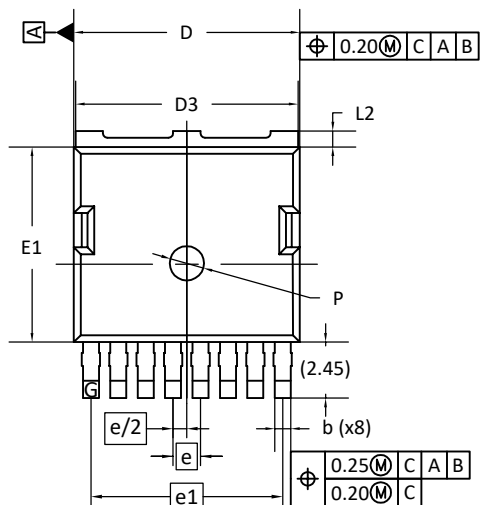


TOP VIEW

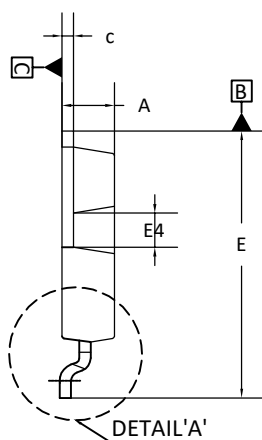


SIDE VIEW

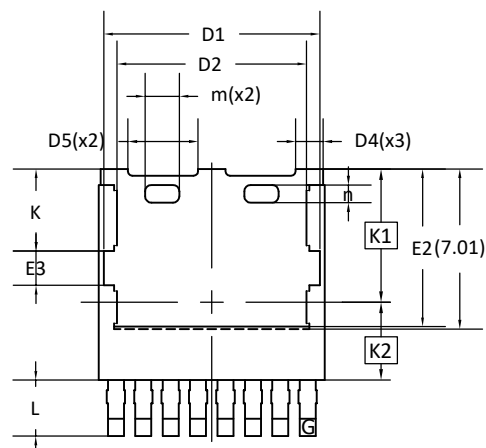

BOTTOM VIEW




SIDE VIEW

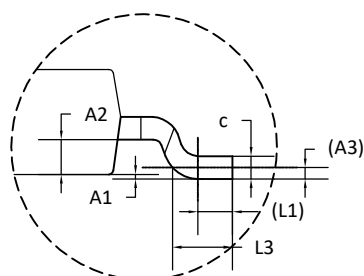

DETAIL 'A'

LAND PATTERN RECOMMENDATIONS

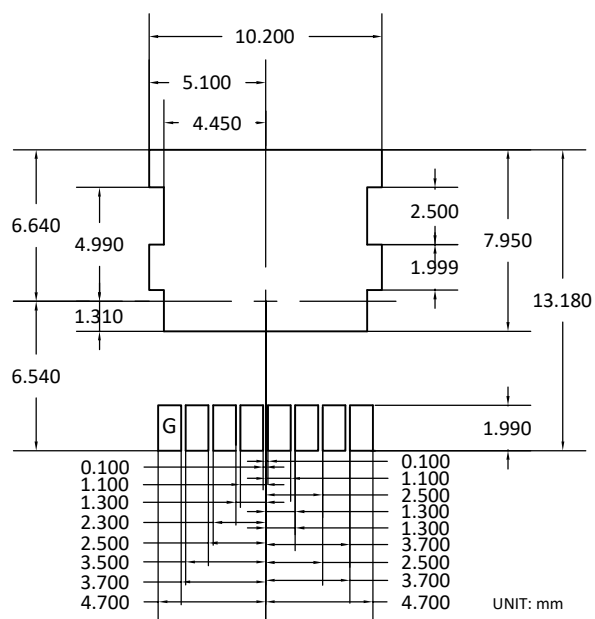

UNIT: mm

NOTE:

- A) PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS. MOLD FLASH SHOULD BE LESS THAN 6 MIL.
- B) TOLERANCE 0.100 MILLIMETERS UNLESS OTHERWISE SPECIFIED.
- C) CONTROLLING DIMENSION IS MILLIMETER. CONVERTED INCH DIMENSIONS ARE NOT NECESSARILY EXACT.
- D) () IS REFERENCE.

SYMBOLS	DIMENSION IN MM.			DIMENSION IN INCH.		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	2.200	2.300	2.400	0.087	0.091	0.094
A1	0.000	---	0.100	0.000	----	0.004
A2	0.735	0.760	0.785	0.029	0.030	0.031
A3	0.250 TYP			0.010 TYP		
b	0.600	0.700	0.800	0.024	0.028	0.031
c	0.400	0.500	0.600	0.016	0.020	0.024
D	9.700	9.900	10.100	0.382	0.390	0.398
D1	9.360	9.460	9.560	0.369	0.372	0.376
D2	8.200	8.300	8.400	0.323	0.327	0.331
D3	9.650	9.750	9.850	0.380	0.384	0.388
D4	1.100	1.200	1.300	0.043	0.047	0.051
D5	3.075 REF.			0.121 REF.		
E	11.500	11.700	11.900	0.453	0.461	0.469
E1	8.450	8.550	8.650	0.333	0.337	0.341
E2	6.810	6.910	7.010	0.268	0.272	0.276
E3	1.500 REF.			0.059 REF.		
E4	1.500 REF.			0.059 REF.		
e	1.200 BSC			0.047 BSC		
e1	8.400 BSC			0.331 BSC		
K	3.500	3.600	3.700	0.138	0.142	0.146
K1	5.840 BSC			0.230 BSC		
K2	3.410 BSC			0.134 BSC		
L	2.440	2.540	2.640	0.096	0.100	0.104
L1	0.760 REF.			0.030 REF.		
L2	0.600	0.700	0.800	0.024	0.028	0.031
L3	1.010	1.310	1.610	0.040	0.052	0.063
m	1.400	1.500	1.600	0.055	0.059	0.063
n	0.680	0.780	0.880	0.027	0.031	0.035
P	1.400	1.500	1.600	0.055	0.059	0.063