


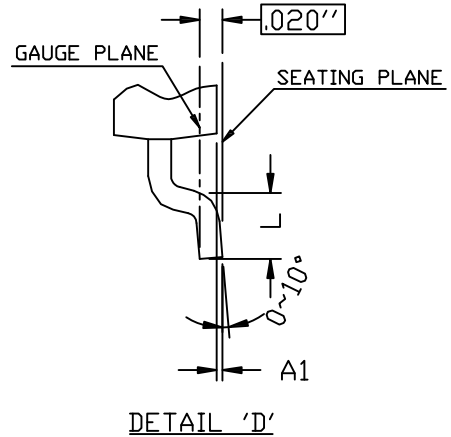
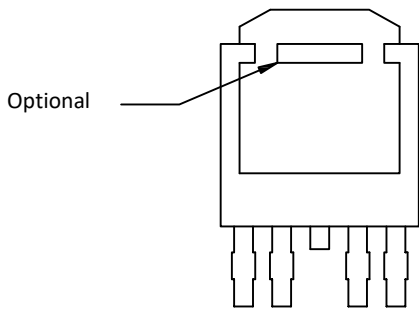


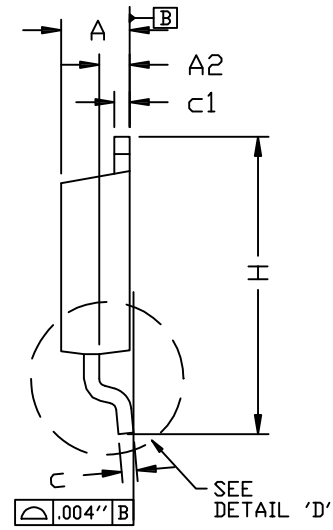

TO252_4L PACKAGE OUTLINE

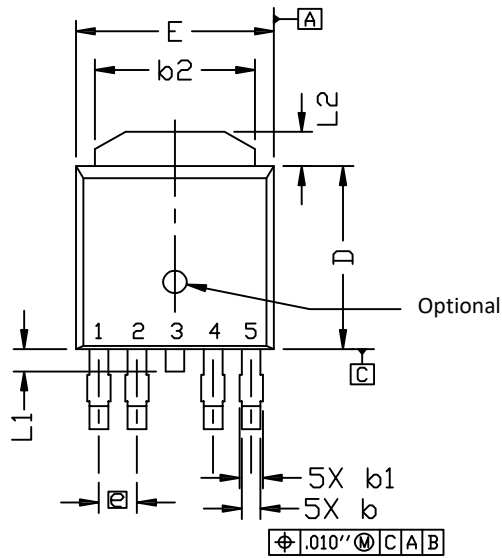

RECOMMENDED LAND PATTERN

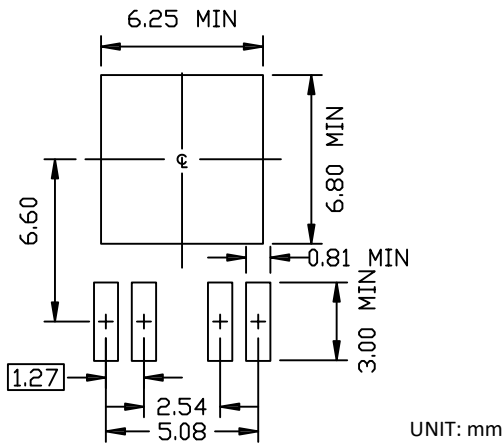

SYMBOLS	DIM. IN MM			DIM. IN INCH		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	2.184	2.286	2.388	0.086	0.090	0.094
A1	0.000	-----	0.127	0.000	-----	0.005
A2	0.889	-----	1.143	0.035	-----	0.045
b	0.508	-----	0.711	0.020	-----	0.028
b1	0.584	-----	0.787	0.023	-----	0.031
b2	4.953	-----	5.461	0.195	-----	0.215
c	0.457	0.508	0.610	0.018	0.020	0.024
c1	0.457	-----	0.610	0.018	-----	0.024
D	5.969	6.096	6.223	0.235	0.240	0.245
E	6.350	6.604	6.731	0.250	0.260	0.265
e	1.270BSC			0.050BSC		
H	9.398	-----	10.414	0.370	-----	0.410
L	1.270	-----	2.032	0.050	-----	0.080
L1	-----	-----	1.016	-----	-----	0.040
L2	0.889	-----	1.270	0.035	-----	0.050

NOTE

1. PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS. MOLD FLASH SHOULD BE LESS THAN 6 MILS.
2. DIMENSION L IS MEASURED IN GAUGE PLANE
3. TOLERANCE 0.10 mm UNLESS OTHERWISE SPECIFIED
4. CONTROLLING DIMENSION IS MILLIMETER. CONVERTED INCH DIMENSIONS ARE NOT NECESSARILY EXACT.
5. REFER TO JEDEC TO-252 (AD)